COMPANY PROFILE

PT. SEIN MEDICALINDO PERSADA





+62 818124566 / 0821-2344-5277

seiniib20@gmail.com

www.semeda.com

Ruko Artha mandiri Abadi
Jl. Semambu Blok Kerta No 97, Cirebon

2025



INTRODUCTION

PT. SEIN MEDICALINDO PERSADA (SEMEDA) Berdiri sejak tahun 2020 merupakan perusahaan yang bergerak dibidang Distributor & Importir alat kesehatan, Laboratorium, Safety Emergency, Alat peraga & Praktikum. Kami menawarkan berbagai perlengkapan dan kebutuhan Rumah Sakit, Klinik, dan Perorangan dengan standard terkini dengan harga yang kompetitif, dan berkualitas.

Produk yang kami tawarkan Produk Lokal & Import berkualitas tinggi yang telah memenuhi standarisasi Nasional maupun Internasional. serta tel dipakai di rumah sakit - rumah sakit terkenal diIndonesi

Untuk kepuasan konsumen kami memberikan Garansi, Spare Part & Service Jaminan backup jika terjadi kerusakan selama masa garansi untuk setiap produk yang telah dibeli dari PT. Sein Medicalindo Persada

OUR LEGALITIES

- Nama Perusahaan : Sein Medicalindo Persada
- No & Tgl. Akte Pendirian : 30 &31-03-2020
- No. SK : AHU-0019164.AH.01.01.TAHUN 2020
- Nomor Induk Berusaha(NIB) : 0220200420174
- NPWP : 94.751.435.2-455.000
- IDAK : FK.01.01/VI/2561-e/2020
- Surat Pengukuhan Pengusaha Kena Pajak (SPPKP
- Surat Keterangan Terdaftar (SKT) Pajak
- Tanda Pendaftaran Agen atau Distributor Barang dan/atau Jasa

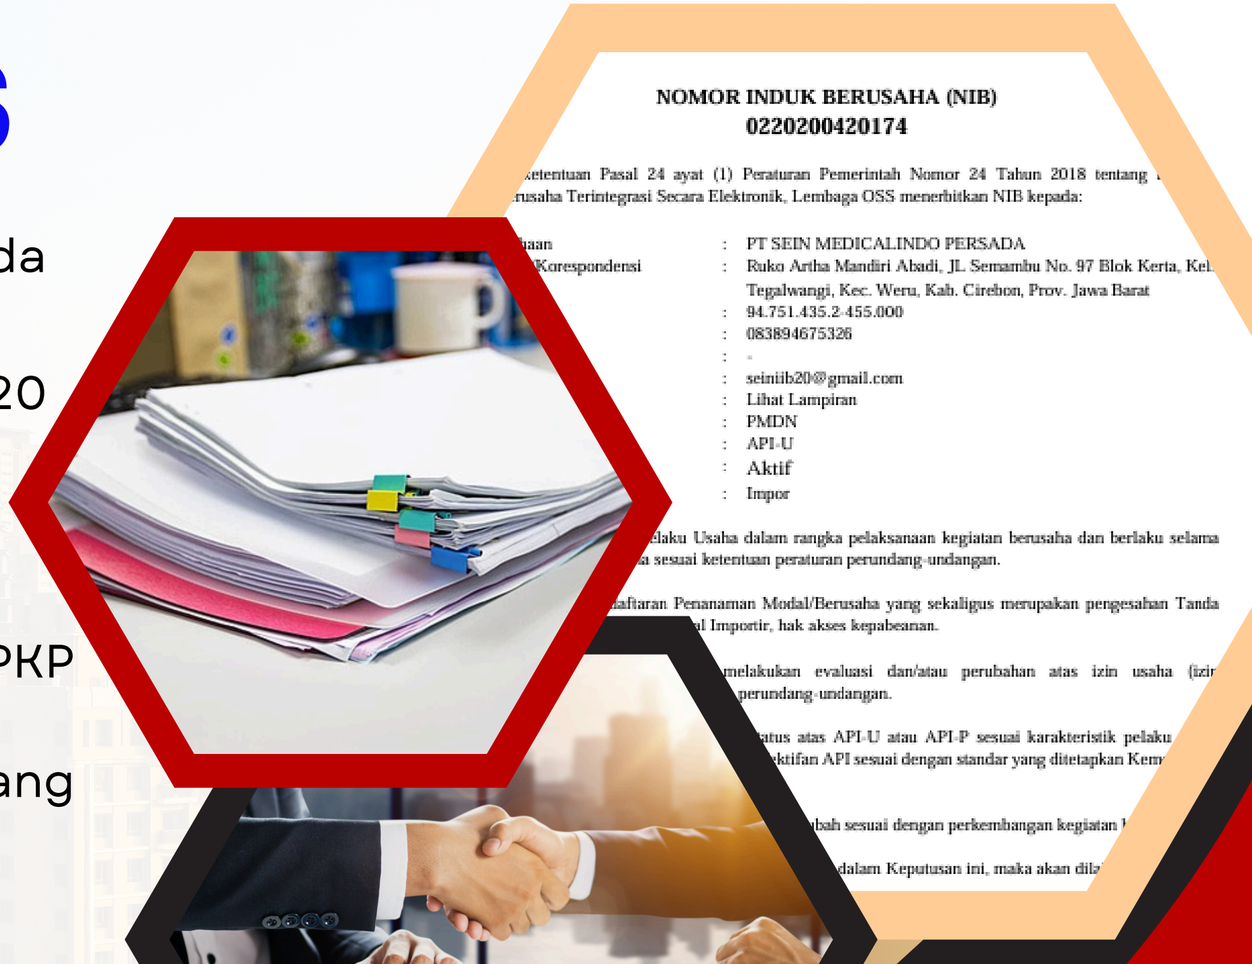

VISION & MISSION

VISI

- Menjadi perusahaan Distri pada Produk Kesehatan, Safety Emergency, Laboratorium, Alat Peraga & Praktikum yang berkualitas baik Nasional & Internasional
- Mampu memberikan pelayanan terbaik bagi customer/ pelanggan baik Organisasi, Industri, Ritel, atau Perorangan



MISI

- Membentuk Sumber Daya Manusia (SDM) yang profesional handal serta berkinerj a tinggi dengan menerapkan prinsip dan tata kelola perusahaan yang baik
- Menjalin kerjasama dalam pengembangan kemitraan yang sali ng menguntungkan dengan Prinsipal untuk melahirkan produk yang Bermutu dan purna jual yang terbaik

OUR BRAND PRODUCT

COMEN

triup

mindray
healthcare within reach

PUAO MEDICAL

Haier

LT
Leytemed

CONTACT US





+62 821-2344-5277

www.semeda.com

seiniib20@gmail.com

THANK YOU







Comprehensive Patient Monitoring System

K Pro series

Modular Patient Monitor



Designed for Critical Care.

The critical care demand is immense in hospitals, especially for patient monitoring. By meeting these challenges today, we have launched the advanced monitoring solution K Pro series and aim to provide better care for the patient.



Crystal Clear Monitoring with Comen's High-end K Pro Series.

- Our refined capacitive screens come installed with multiple user-friendly designs to facilitate operations in most clinical settings.
- Bundled with high-end monitoring parameters including NMT, Masimo Rainbow Set, rSO2, apnea wake-up and O2, the K Pro series provides more tools for diagnostic accuracy.
- The K18 Pro is equipped with a dual system which incorporates a patient monitoring system with iCM system that is developed based on WindowsD, which allows clinicians to have direct access to hospital databases on the monitor such as HIS, EMR and PACS.
- The K Pro Series can also be connected to other clinical equipment such as anesthesia machines, ventilators and infusion & syringe pumps, to integrate and display comprehensive patient data, thus creating one-stop monitoring platform that is furthered by the inclusion of centralized monitoring and multiple functions for the processing of physiological parameters during critical patient care.

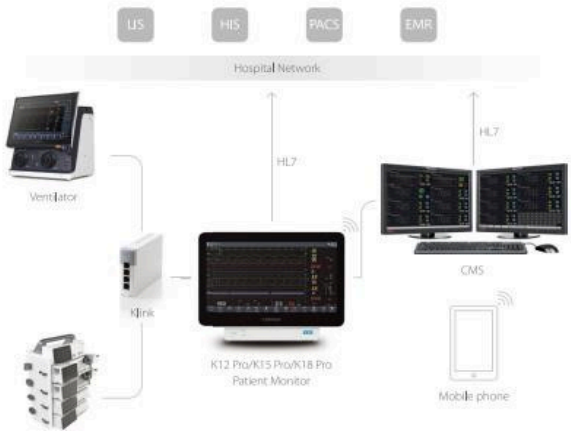

K1

Specialized Transport Patient Monitor



Seamless Integration, Just Dock It.

- With the certification of EN1789, the K1 can be used as a specialized ambulance transport patient monitor.
- Couples as plug-and-play multi-parameter module for the K Pro series patient monitors to achieve seamless transmission of patient data from transport straight to the ICU.
- Compact and flexible, the K1 also functions perfectly as a bedside patient monitor when equipped with a module rack and docking station that enables connection to an external display.



Concise, Intuitive, Powerful

- Compact size 148.4×79.2×96.5mm, Light weight 2.5kg
- Fixed handle and modular rack, carry with ease
- 5.5-inch capacitive touchscreen 1280×720 high resolution
- Supports multi-touch operation, easy to learn and operate
- IP44 Ingress Protection, 1.2m Drop Endurance and 10-hour Battery Life



Diagnostic Excellence through Reliability and Versatility

- K1 delivers basis measurements including 3/5/6/12-lead ECG with ST and QT analysis, respiration, NIBP, SpO2, temperature, built-in sidestream EtCO2 and dual IBP.
- With modular rack, K1 supports one extended module and provides advanced measurements including mainstream or sidestream EtCO2, dual IBP, invasive cardiac output(C.O.), BIS, AG, NMT, RM, Rainbow Set and apnea wake-up function for infants.
- Alarm Event 2000 groups, NIBP 2000 groups, ARR Event 48 hours, Full Disclosure 48 hours, Trend Graph and Table 160 hours.
- Clinical Assistive Application(CAA) including Early Warning Score (EWS), Glasgow Coma Scale (GCS), SpesisGuide and 24 hours ECG summary.
- WIFI and wired connection to central monitoring system on the move or at the bedside. Seamless and offline data transmission to K Pro Series when working as a module.

K22Pro

Patient Monitor



Thus, Comen develops K22Pro to fulfil the needs of 'bigger' vision. For its screen size, it provides a 21.5-inch capacitive screen. In the meantime, the monitor can rotate to either landscape or portrait mode.



See More, From Another Perspective

For clinicians, viewing more vital signs from the monitor is significant. Especially, when the patient is under severe condition, a great monitor able to provide more insights can help the clinicians to make informed decisions.

Regarding the landscape, it enables clinicians to view longer chosen waveform on the monitor and observe their variance in detail. In comparison, portrait mode is aimed to display more waveform channels, under this mode, clinicians can select more vital signs to display on the screen simultaneously. It is suitable for the patient required a comprehensive monitoring.



N Series

Patient Monitor



Clear and Efficient Monitoring

For patient monitoring, It's significant to see measurement results quickly and clearly for caregivers during patient monitoring. With a high-resolution display and a capacitive touch screen, the N series can facilitate clinicians to observe clearly and complete the monitoring settings efficiently.

More Capability in One Monitor

In addition to supporting the monitoring of essential vital signs through pre-configured parameters, It can be easily extended to two advanced parameters simultaneously. This makes Comen NM & NMPro modular patient monitors can better provide advanced monitoring solutions whether you are in the emergency room, ICU, NICU, operation room, etc.



flexibility and Adaptability for Emergency Room

Comen N series provides a unique DC power connector for the N10, to support the long-term monitoring in pre-hospital transportation. In addition, the semi-modular design of N10M/N10Pro ensures flexibility for acute care.



Comprehensive monitoring in the ICU department

Comen N series can provide you with a comprehensive view of the patient's status including continuous cardiac output, Masimo Rainbow Set, IBP, Qt and Qtc analysis, ST monitoring, etc. Which can provide the clinicians with a comprehensive view of the patient's state.



Unique functions designed for NICU

It can not only provide basic parameters to monitor the physical condition of prenatal mothers but also provide unique parameters for use in NICU.

Apnea wake-up and oxygen concentration monitoring functions are specially designed for neonates. In addition to supporting the monitoring of the oxygen concentration in the incubator, it can effectively monitor the respiratory rate in real-time and provide appropriate shaking for newborns to wake them up during apnea.

Intuitive SpO2 interface to help assess neonatal health and reduce the risk of oxygenation intuitively.

OxyCRG interface provides an indicator of breathing efficiency and brain maturity. It combines the compressed trends of a neonate's beat-to-beat heart rate, respiration, and oxygenation levels and presents them in a straightforward display on Comen patient monitors.

S8/S5

Defibrillator Monitor



Comprehensive operation modes

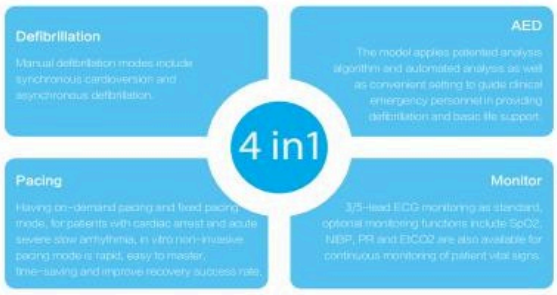

Advanced BTE Technology

Higher efficiency with Advanced Biphasic Truncated Exponential (BTE) waveform technology and automatic impedance compensation.

Up to 360J energy selection, for patients with high defibrillation thresholds such as myocardial infarction, obesity, high impedance, higher energy selection indicates greater defibrillation success rate.



Fast Defibrillation



1 knob

Mode can be switched among manual defibrillation, pacing and AED. In manual defibrillation, the user can complete the energy selection within 1 second.

3 seconds

Defibrillator charge to 200J and shock in 3 seconds, rescue time is guaranteed fully.

3 steps

Fulfill defibrillation operation (Energy selection – Charging – Discharging).

SCD600

Sequential Compression System

For preventing DVT and PE



Comen disposable sleeve is designed with thin and fine TPU material, it ensures the comfort of patients during compression by addressing sweat and heat. Moreover, to improve the patient acceptance, Comen disposable sleeves can minimize sweat pooling, irritation and itching.

In addition, to provide a more durable experience for single-patient use, Comen disposable sleeve can inflate up to 5,000 circles.



FO-01-F		040-00001100-00
Non-woven fabrics+TPU	Leg/Three channel/Disposable/Adult	725*600mm±20mm 900*600±20mm



F0-02-F		040-0001102-00
Non-woven fabrics+TPU	Calf/Three channel/Disposable/Adult	660*340mm±20mm 800*340±20mm

FO-03-F		040-00001159-00
Non-woven fabrics+TPU	Left foot/Single- channel/Disposable	360*420*206mm ±20mm

FO-04-F		040-00001160-00
Non-woven fabrics+TPU	Right foot/Single- channel/Disposable	360*420*206mm ±20mm



Light and Comfortable

Flexible and efficient workflow, SCD600 features a light body and unique clip design for handy and intuitive control experience. All of this allows for greater flexibility and comfort for both clinicians and patients.



Powerful and intelligent

Focus on patients, providing personalized treatment with intelligent compression, dynamic and visualized treatment.

Accurate and reliable

Medical- grade dual pressure sensor features real-time pressure collection and provides double overpressure protection to ensure patient safety.

The Dual CPU processor gives real-time monitoring of the entire treatment process to ensure safe and reliable treatment.

NC3

Vital Signs Monitor



Specially designed for inpatient monitoring and ward rounding, easy and quick to learn basic vital signs; Configured with easy-to-use NIBP, SpO2 functions; Quick ear temperature measurement technique in clinical application: use infrared ear thermometer to learn ear cavity temperature in 1-2s, which is uploaded wirelessly to NC3;

12 hours battery life under standby mode, high resolution display; Simple and elegant, compact and lightweight; Aesthetics, technology, science and wisdom in one.

NC5

Vital Signs Monitor



Ingenious and Minimalistic, Smart and Lightweight

Applied to outpatient, emergency and general wards.

As a spot check monitor and bed side monitor, it integrates NIBP, SpO2, ECG, Ear Temp. It is simple, tasteful, compact and lightweight, a perfect combination of technology and aesthetics.

NC 12

Screen Size : 12.1 inch



NC 8

Screen Size : 8 inch



NC 10

Screen Size : 10.4 inch



Multi-parameter Patient Monitor

Simple, reliable, multi-functional.

Semi modular patient monitor, combined the advantages of normal patient monitor and modular patient monitor, which can meet different demand of different department in hospital.

Support rotary knob, buttons and touch screen operation.

Plug and play modular design offers the most commonly used parameters, including CO2, IBP, AG, C.O. ,BIS.

Screen brightness auto-adjustment with ambient light sensor.

Button bar was located at right side on the front shell, more convenient for using.

The fanless design avoids cross-infection on laminar, ultra-quiet.

U8

Catheter-positioning Guiding System



CVAD operating platform integrating ultrasound and ECG positioning

CVAD (central vascular access device) is a catheterization technique in which a catheter is inserted through a peripheral vein and the tip of the catheter is placed in the SVC (superior vena cava) or IVC (inferior vena cava). It includes PICC (peripherally inserted central catheter) and CVC (central venous catheterization) PORT.

It is mainly used for measuring CVP (central venous pressure), chemotherapy, parenteral nutrition pathway, and administration of high-risk medication (hypertonic, high-acidic and high-alkaline).



Vessel localization and evaluation | Diagnosis of the ectopic catheter | The positioning of the catheter end

In response to the above problems, Comen U8 proposes a CVAD puncture solution.

CVAD Solution

Traditional CVAD puncture and catheterization requires requires to use various devices, which occupies large space and involves complicated operation. Meanwhile, interference between the equipment would effect the quality of ultrasound images and the stability of ECG waveforms. U8 has solved these problems and helped clinical staff to make decision confidently.

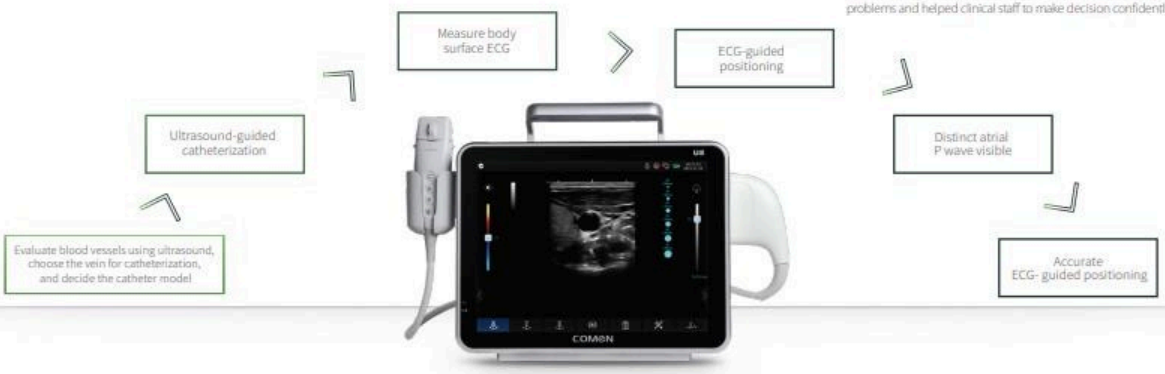

H12

Electrocardiograph



- 10.4 LCD touch screen
- 12x1, 6x2 format display, vertical screen display
- Support handwriting input
- 10000 patient case storage, support JPG format storage
- FTP / DICOM protocol allow connection with hospital
- HIS, EMR, PACS system without PC workstation

H3

Electrocardiograph



- 6.2" LCD touch screen
- Screen brightness auto- adjustment with ambiant light sensor
- 3x4 and 6x2 display format, 12- lead display simultaneously
- 10000 patient case storage, support JPG format storage
- FTP service allows patient case download in a remote network

CM1200

Electrocardiograph



- 12.1"folding-up touch screen
- Support multi-language, printing preview
- Sleep/wake up mode for saving energy and extending screen life
- Lead status display
- Alphanumeric keyboard, support hand-writing patient information input
- Anti-defibrillation
- 10,000 ECG internal memory
- Last 120 seconds 12-lead waveforms reviewable and recordable
- 216/210mm thermal printer, support rolling paper, and Z-fold paper
- External printer and data transmission support by USB port
- Optional ECG working station

CM1200A

Electrocardiograph



- 8.4 inch LED touch screen
- Alphanumeric keyboard and hidden handle
- Lead status display
- Manual/ Auto/ Rhythm working modes selectable
- Support 4 hours working time
- 300 ECG internal memory
- 210mm, 216mm roll and Z-folded paper for options
- Net-grid on screen for easier observation

CM1200B

Electrocardiograph



- 5.7" Screen
- Lead status display
- Numeric keyboard, backlight design for night use
- 300 ECG internal memory
- 120 seconds 12-lead waveforms reviewable and recordable
- Support 210mm rolling paper, Z- folded paper
- External printer and data transmission support by USB port
- Optional ECG working station
- Basic economic model

C11

Fetal Monitor

- 5.7" screen
- Built-in 112mm thermal printer
- Quick release button for paper replacement
- Built-in Lithium-ion battery, up to 4 hours
- Auto/manual fetal movement marker
- Automatic fetal status scoring system
- FHR signal strength indicator, twins cross channel verification
- Power-off data protection for 300 cases
- 60 hours real-time waveform replay & storage
- Timing monitoring function to avoid over time monitoring
- Support timing printing
- Compatible with COMEN central monitoring system



C21/C22

Fetal & Maternal Monitor



- 12.1" LCD touch screen
- Screen can be adjusted for multi-angle observation
- Suitable for antepartum and postpartum applications
- Fetal interface, fetal and maternal interface, big font interface
- High sensitive waterproof FHR transducer
- Auto/Manual fetal movement marker
- Built-in 152mm Thermal Printer
- Compatible with COMEN central monitoring system
- Automatic fetal status scoring system: NST, FISCHER, IMPROVED FISCHER, KREBS

C20

Fetal & Maternal Monitor



- 12.1" LCD touch screen
- Full keyboard design makes clinical editing more easily
- Screen can be adjusted for multi-angle observation
- Suitable for antepartum and postpartum applications
- Fetal interface, fetal and maternal interface, big font interface
- High sensitive waterproof FHR transducer
- Auto/Manual fetal movement marker
- Automatic fetal status scoring system
- Built-in 152mm Thermal Printer
- Compatible with COMEN central monitoring system

C90

Multi-parameter Patient Monitor

C90 monitor is integrated with the world-leading vital signs parameter monitoring technology and IT application technology to make a high-end vital signs monitoring platform and provide a comprehensive monitoring solution.



- 17"high resolution LCD touch screen: 1280 X 1024
- Rotary knob, buttons and touch screen operation.
- Built-in lithium battery, to ensure keeping continuity of patient's data during
- operation with its running time over 2 hours
- Bracket solutions: Trolley
- Supporting built-in thermal printer and external laser printer
- Module conductive contact: gold-plating technology, excellent conductivity
- Infrared transmission for module data transfer

C70

Multi-parameter Patient Monitor



Classic Continuation
Continuous Innovation

C70 inherited the outstanding character of our Patient Monitor C90 and adopted with highly integrated modular mechanical structure, it efficiently combines the structure, function and maintainance management.





C80

Multi-parameter Patient Monitor

12.1" LCD touch screen

C86

Multi-parameter Patient Monitor

15" LCD touch screen

C80/C86 is the new generation of patient monitor designed and developed by COMEN. C80/C86 is equipped with USB port, convenient handle, multiple mounting solutions, IPX1 level waterproof cabinet design and sturdy housing to withstand rough handling.

C80/C86 fulfills the hardware requirements for intensive care monitoring in multiple environments, efficiently caring for human life every second.

C100

Cardiovascular Monitor



- C100 has passed IEC 60601-2-25 ECG Machine Specialized Standards.
- Advanced performance: Input impedance≥50MΩ,
- Polarization resistance voltage: ≥±650mV,
- Common mode rejection ratio: ≥105dB, Time constant: ≥5S.
- 72 hours full disclosure 12-lead ECG waveform review.
- Shortcut key for ECG, one key switch between the monitoring mode and the ECG mode.
- 216mm modular printer, synchronous printing of 12-lead ECG.

C30

Transport Patient Monitor



- 4.3-inch touch screen with 16:9 colorful LCD display.
- With only 1.5kg weight for transportation.
- Automatic data exchange with C70 / C80.
- Three-level sound and light intelligent alarm.
- Adjustable alarm volume.
- Dual lithium batteries: C30 has a built-in 2200mAh lithium battery, and the special rescue bag has a built-in 4400mAh lithium battery. Can support more than 8 hours of continuous work.
- Extensive data storage capability for alarms, events, NIBP measurement, and up to 48 hours of trend storage and review.



C50

Multi-parameter Patient Monitor

- 10.4"LCD touch screen
- Support rotary knob, buttons and touch screen operation
- Perfect patient information management system
- 5° inclination screen makes bedside monitoring easier
- Fan-less design, avoid cross contamination on laminar, ultra quiet.
- IPX1 waterproof
- Intelligent alarm technique, automatic recognition alarm level

C60

Neonatal Patient Monitor



- 8.4-inch touchscreen.
- Lightweight, compact, and a built-in battery can support at least 2 hours of continuous work.
- Standard Masimo SpO2, and support apnea wake-up function & oxygen concentration direction monitoring function which are specially designed for neonatal.
- C60 enhances the anti-interfere capability of NIBP measurement to ensure data accuracy even in neonate's movement.
- According to the symptom of low perfusion, COMEN * uses the Adap-DSP system to provide more accurate measurements for neonates.
- Specialized neonatal measurement mode, software & hardware over-pressure protection.

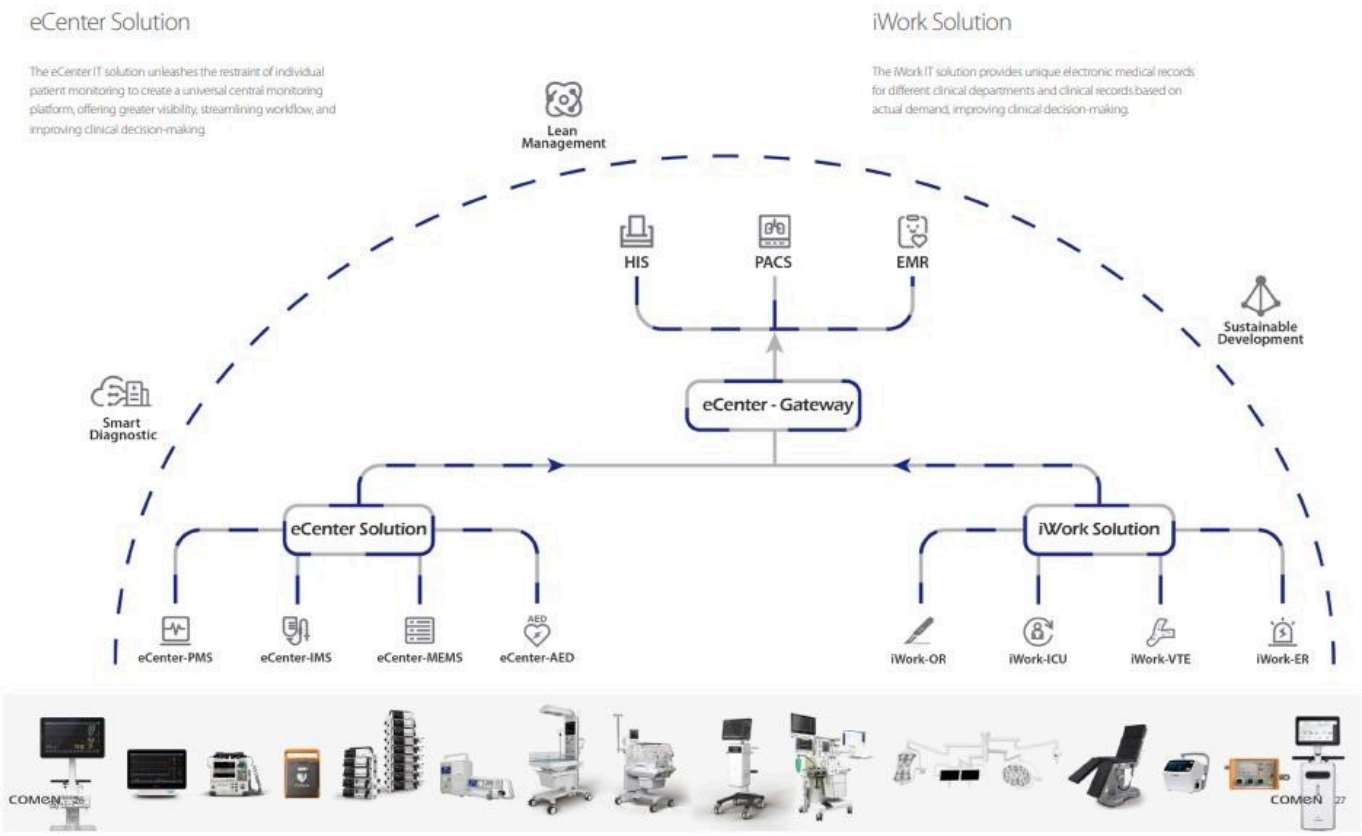
eCenter Solution
The eCenter IT solution unleashes the restraint of individual patient monitoring to create a universal central monitoring platform, offering greater visibility, streamlining workflow, and improving clinical decision-making.
iWork Solution
The iWork IT solution provides unique electronic medical records for different clinical departments and clinical records based on actual demand, improving clinical decision-making.
Lean Management
HIS
PACS
EMR
Sustainable Development
Smart Diagnostic
eCenter - Gateway
eCenter Solution
iWork Solution
eCenter-PMS
eCenter-IMS
eCenter-MEMS
eCenter-AED
iWork-OR
iWork-ICU
iWork-VTE
iWork-ER



BQ80
Infant Radiant Warmer



New Neonatal Nursing and ResusCare Platform

This is by far the most powerful 4 in1 neonatal resuscitation and open caring platform. The BQ80 integrates four key systems to achieve one-stop operation and management throughout the whole transition and stabilization period. At the same time, it scientifically optimizes the workflow, helps medical staff to easily respond to urgent medical needs, effectively saves the valuable rescue time, and provides comprehensive and meticulous care for newborns.



Warming

Quick pre-warm, heat evenly distributed, effective radiant warming

Dual ceramic heating tube with and reflector with higher light utilization rate



Monitoring

Integrated multi-parameter monitor for better concentration and organization

Plug-and-play modular monitor, also suitable for transport and incubators



Resuscitation

3 independent outlet of PPV+Suction+Oxygen therapy for efficient resuscitation

Pure mechanical, override pressure prevention, wall/cylinder gas inlet available



Transport

Gas cylinder holders and UPS mounting solution for intrahospital mobility

~30mins of transport running time



Phototherapy

Integrated phototherapy for continuous jaundice treatment in open care environment

3 level adjustable, optimal intensity, long life span, large effective treatment area

B Series Neonatal Incubator



B6/B8 B5/B3 B2

Sufficient and accurate thermal regulation

- World-class precise temperture and humidity control to ensure better temperature uniformity ≤0.5 ℃
- Get ready for new admission quickly with swift warm-up and humidifying rate
- 7 temperature sensors, thinner probes, cascade PID algorithism and fine-tuned air delivery chamber for excellent monitoring and control accuracy narrow to ±0.2 ℃





Humidity Control Technology

Efficient Humidity Control System

Maximum humidity setting: up to 99%

Accuracy: ±5%



Specialized Modular Monitor

- Plug & play transportational monitor for seamless data from birth to discharged
- Integrated display with interconnection to increase working convenience
- Specialized algorithm for neonatal ECG/NIBP/SpO2 detection sensitivity and accuracy
- Patented apnea detect and wake-up solution to safeguad neonates' spontaneous breath and nourish future growth



ExNeo*



Adap- DSP*



Apnea self- saving

Oxygen Control Technology

Servo Oxygen Supply and SpO2 Monitoring

Closed-Loop Servo Oxygen Control supplements neonates with O_2 enrichment within the incubator through real-time feedback of Oxygen parameters.



BC Series
Neonatal Incubator



Clear vision

The transparent bedside walls provide mom a clearaway view of baby, enabling eye contact.With well design and fine material, it is the best choice for baby care.

Better Air Circulation

Bottom holes designed for air circulation through the mattress and bassinet.

Meticulous design

The pressing handle allows the bassinet bed to be tilted at any angle between 0° to 12°, preventing regurgitating milk and reducing mom's worries.



Flexible height

Adjustable height is able to meet different nursing needs.

Convenience storage

Featuring large space, easy disinfection, the basket allows infant caring within reach.

Quiet and stable

Medical locking caster wheels enable baby to sleep soundly and sweetly even during transportation.

BL70
Infant Phototherapy Equipment





High-intensity irradiance

- Equipped with high-intensity LED cold light source, with less heat production, BL70 supports long-time treatment.
- With the maximal irradiance level of 63μW/cm²/nm, BL70 enhances the bilirubin breakdown ability and shortens the treatment time.
- With five levels irradiance adjustment, BL70 allows treatment tailored to each patient's need.

Precise Treatment for Neonatal Jaundice

Equipped with an irradiance probe to accurately measure the irradiance value and ensures that the baby receives enough irradiance, achieving precise treatment.



Irradiance probe

After height adjustment, current phototherapy irradiance value of 5 levels can be displayed on the screen.

Precise positioning

Using unique red light precise positioning, BL70 ensures correct position of the baby.



Ward round assistance

When doctor doing ward checking, it is unnecessary to take off the cover, and check neonates condition through the screen in real time.

P3/P6
Temperature control system



New Neonatal Nursing and Rescue Platform

Induction[1]

Rapid cooling through the use of cooling blankets to reach a core body temperature of 33℃ to 34℃ within 2 hours.
The P6 utilises innovative Semiconductor Cooling Technology to rapidly meet target temperatures.

Maintenance[1]

Maintains newborns' core body temperature at 33.5℃ to 34℃ for 72 hours.
Safety through Real-Time Monitoring to reduce the accidental occurrence of complications.

Rewarming[1]

Recovers newborns core body temperature to 37℃ at 0.5℃/ 2 hours with normothermia maintenance.
The P6's exceptional Intelligent Gradient Warming System accommodates most clinical settings to provide Comfort and Ease of Access.

[1]. Seetha Shankaran. Therapeutic Hypothermia for Neonatal Encephalopathy 2013 Dec 1. Curr Treat Options Neurol. 2012 Dec; 14(6): 608–619.

New Neonatal Nursing and Rescue Platform

P3/P6's intelligent closed-loop temperature control system automatically adjusts water temperature based on the monitored patient's core temp. The monitoring of the patient (both skin & core), water temperature ensures the safety throughout treatment, rewarming and maintenance while also avoiding other complications caused by long-term hypothermia.

Quick access buttons on the side of the screen allows caregivers to easily switch between Hypothermia mode and Normothermia mode, tailored for versatility without the hassle when attending to patients' needs.

- Hypothermia Mode comes with an Intelligent Automatic Transition from Cooling-Maintenance treatment to Rewarming when Auto Mode is selected.
- Normothermia Mode is applicable during surgery to help patients maintain stable temperatures, tailored to best meet every unique surgical situation.



Hypothermia mode



Normothermia mode

Round-the-clock Protection through Modular Monitoring

Unexpected complications in newborns receiving therapeutic hypothermia can be overwhelming and stressful due to the influence it has on their cardiopulmonary system, which is why, to lighten caregivers' load, we provide constant monitoring of vital signs to ensure that nothing goes unnoticed.



NV7/8/9 Neonatal Ventilator

The Epitome of Neonatal Non-invasive Ventilation

- NCPAP+apnea wakeup function
- SNIPPV+backup ventilation
- One button for fast oxygen ventilation
- NIPPV
- HFNC+pressure monitoring function
- Manual ventilation

Exceptional apnea wakeup function: apnea monitoring and alarm function, providing positive airway pressure to lower the risk of neonatal apnea.

iFlow Intelligent Closed-loop Control System



Fast and simple pressure setting: easy to setting the pressure through touch screen in one step.

Coanda-effect pressure generator: Provding stable pressure to settle neonate's weak resilience, and near the nose monitoring is more accurate and read.

Real-time leakage compensation: iFlow system can automatically compensate leakage to guarantee ventilation treatment efficiency.

O2 Concentration Control System

Fast and easy Fio2 setting: adopt electronic control of air-oxygen blending to directly set FiO2, more precise and accurate.

Accurate O2 concentration monitoring: CITY O2 concentration sensor, short react time and instant monitoring.

One key calibration: one key to calibrate the O2 concentration, automatically success after a moment.

SpO2 Monitoring: NV9 is configured with Masimo/Nellcor SpO2. The effect of non-invasive ventilation is judged by the changes of SpO2.



KL-20

Medical Air / Oxygen Blender

An independent gas mixer receiving separate oxygen source and air source, and delivering mixed gas with adjustable oxygen concentration and volume;

Incorporate humidifier and oxygen tube/pressure generator into oxygen apparatus/CPAP machine.





NV6

Neonatal Ventilator

Bubble CPAP not only provides CPAP ventilation therapy, but also it is unique care for patients lies in that the high frequency vibration bubble makes the airflow of entering into patient's respiratory system produce high frequency oscillation, so that it gives a quick tap for the lung of patient, hence to improve the respiratory function, reduce the amount of dead space, advance expectoration and speed recovery.

With HFNC high flow O2 theraphy, NV6 is easier to use and able to avoid damage to the patients.

VS-20

Pure And Ultra-quiet



VS-20 applies high-effective filtering technology to provide pure compressed air.



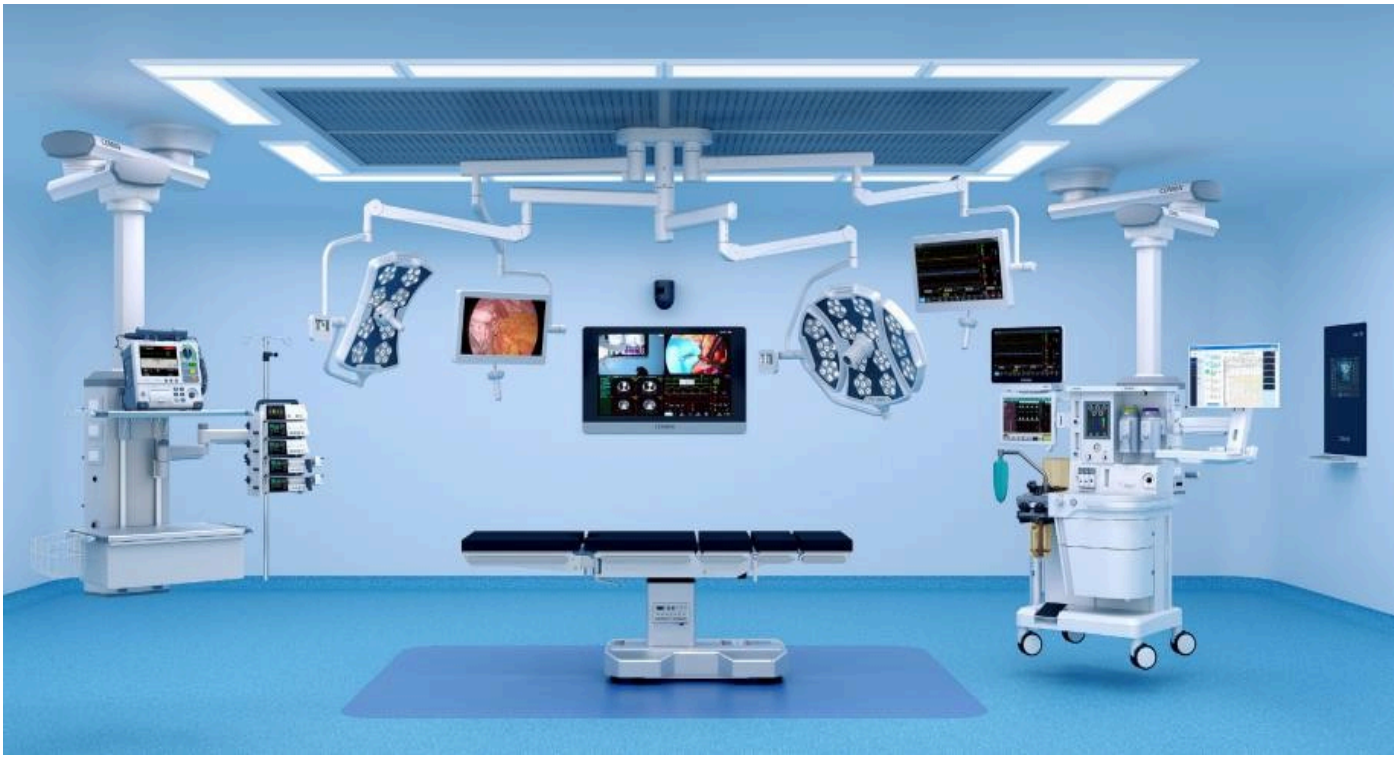

AX-900

Anesthesia Machine



Full electronic flow control system

- Full electronic flow control system
- Fully electronically controlled fresh gas flow greatly improves accuracy of flow and oxygen concentration.
- Closed- loop oxygen concentration control technology: The user directly configures the oxygen concentration and total volume of flow. The system automatically matches the ratio and dynamically calibrated it in real time.
- Best flow indicator tool: scientifically guide the clinical implementation of low- flow anesthesia while saving costs.
- Fully electronic gas source control system: electronic monitoring of gas source pressure; once there is overpressure or underpressure; the electronic system would respond quickly.
- Negative pressure expectoration system: no need of negative pressure source; the equipment is converted to negative pressure through the Venturi effect and positive air pressure; and the flow can be adjusted independently.
- A brand new auxiliary oxygen supply system: support off-line operation; fast oxygen therapy; can produce gas of any volume of oxygen concentration.
- The high pressure oxygen source can support the rescue ventilator.





The minimum tidal volume down to 5ml under PCV mode

7% high accuracy ventilation

Breathing circuit leakage as low as 75ml/min

Dual-Screen Design

- 15- inch four- way rotating touch screen: Facilitates operators of different heights to observe in real time and operate accordingly.
- Reasonable partitions of configuration parameters and monitoring parameters; all the observations and operations can be completed within 2- level menu.
- 8-inch integrated screen solely for electronic flow meter.
- Bookmark menu that is self-explanatory and easy to use.

Breathing circuit

- Compact and integrated design with circuit leakage volume of less than 75ml/min.
- Improve the safety and convenience of system use.
- Made of PPSU material that is corrosion resistant, durable and autoclavable.
- Easy disassembly and disinfection and hence less maintenance time required.
- With by-pass technology, the CO2 canister can be changed during the operation without leakage problems and the built-in heater can eliminates internal water condensation effectively.



Anesthesia Machine Family

From economical options to high-end choices, Comen has the capability to support all types of respiratory demands and provide all range of anesthesiology solutions.



A5/A7

Anesthesia Machine

Compact & Precise Breathing Circuit

- The highly integrated breathing circuit design reduces the air resistance of the breathing circuit effectively.
- APL valve can quickly exhausts the pressure in the circuit to the lowest value, which ensures patient's safety under manual ventilation.
- With by-pass technology, the CO2 canister can be changed during the operation without leakage problems.



Comprehensive Ventilation Support

Extensive ventilation mode selections can satisfy clinical demands for entire perioperative period and provide safe, efficient and comfortable ventilation support for the patients.

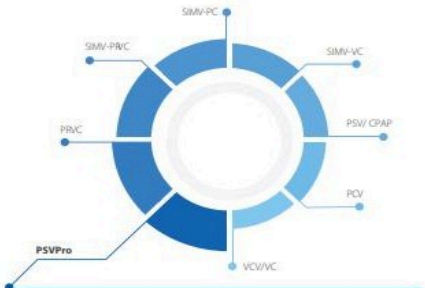

PSVPro: Advanced and high-end ventilation mode, is designed to give smarter and more efficient pressure support for the patient.

Ergonomic Operation Platform

- 8.4-inch touch screen displays up to five waveforms simultaneously.
- Three-drawer design provides caregivers with a larger medical accessorie storage space.
- 0-15 l/min Dual-channel mechanical flowmeter allows a wider flow adjustment
- Three-slot modular design supports more high-end parameters monitoring including AG+O2, AG, BIS, CO2 and NMT.
- A7 includes advanced auxiliary tools to facilitate operation: Flush O2, ACGO, AGSS etc.



L6SC

LED Surgical Light

L6SC is a high-end surgical light from COMEN that can deliver highly effective lighting during surgical operation, so surgeons will obtain clear view of targeted wounds without vision being obscured.

Constant and stable illumination | 100% shadowless rate | Quality hardware

6 Major Outstanding Features of L6SC

Smart Intensity	Adaptive Lighting	Elliptical Spot
Intelligent Shadow Management System	Adjustable Color Temperature	True-to-life Color Representation



The light panel of L6SC adopts arc and hollow out design to avoid dust forming and assist laminar flow.

End-User Oriented Design

L6SC is the first surgical light that takes operator's optical health into consideration. L6SC adopts a DC dimming technology, which reduces visual fatigue by eliminating high-frequency flash and removes ripple waves during video recording.

Durable LED light bulb
Up to 70,000hours service lifetime

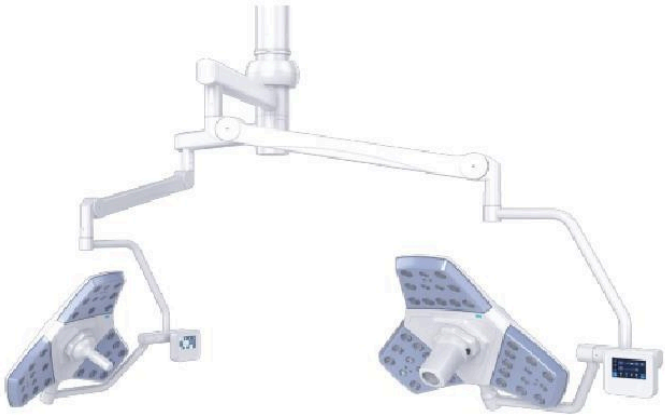

L5
Surgical Light

Compact and Efficient

Powerful independent working function

- Lamps' Lifespan up to 70,000 hours, , more durable than ever
- Central Illumination: 160,000 lux/120,000 lux, 3 modes meet various of surgery requirements
- Max. depth of Illumination: 1,300 mm
- Lower power consumption

Unique Function

- **Adaptive Lighting Technology**

  25cm up/down movement of the surgical lamp will no change the illumination under the specified illuminance
- **Illumination stabilization technology**

  L5 adopts DC dimming technology, that means it can protect the surgeon's eyes from the flickers of the traditional PWM dimming, what's more, it will no cause the waves during filming
- **Illumination capacity technology**

  Spot size will not change while the illuminance was changing, to make it more convenient for medical staff operation.
- **Customized configuration**

  L5 allows operator to save 3 customized settings to reduce unnecessary adjustment

L3
Surgical Light

Economically Quality-Ensured Choice surgical light

- The Ra of L3 is up to 98, which enables truest color presentation of the wound
- Lamp lifespan is up to 70,000 hours, more durable than ever
- Endoscopy mode with optional green light or white light selection based on surgeon's operating preference





LM Series
Mobile Surgical Light

L5-AM/L5-BM/L6SC-AM

Anywhere
Anytime

Unlike traditional surgical light, the LM series mobile surgical light could be easily assembled and used in various settings and diverse hospital environments. Maneuverability of the LM series just became easier and effortless with its mobile stand and large capacity.

The LM series mobile surgical lights are suitable for different clinical practices, including but not limited to operating rooms, obstetrics departments, dental clinics, aesthetic and beauty centers and veterinarian hospitals.

Adaptive for Various Clinical Scenarios

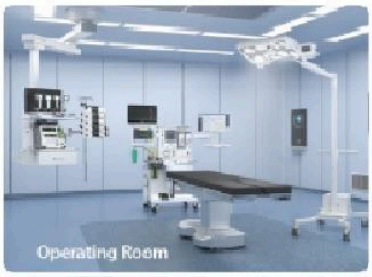

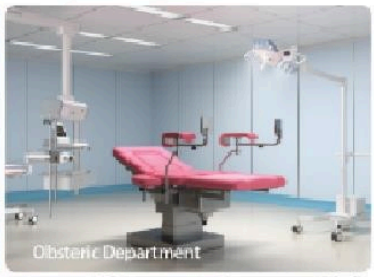







Adjustable Angle

LM series is equipped with a flexible rotatable mechanical arm to better accommodate different operating demands.



Smooth Movement

Eliminates the hassles for installation.

Slim and streamlined stand design can be easily fit into any tight workspaces.



Built-in Battery

All LM series models are equipped with built-in battery, so they can provide up to 4 hours of illumination even without power supply. Therefore, LM series can greatly facilitate intra-hospital transport in case of unexpected power outrages.



W3/W5 Operating Table

Wide Rotational Angles & Multiple Accessories Choices

The COMEN W5 boasts the widest range of rotational angles, allowing for more precise patient orientation and positioning.

With a wide array of available accessories and postural pads, the W5 can support orthopedic, cardiovascular, extradural, spinal, facial features, liver and kidney, urinary and other operations.



Laparoscopic surgery



Thyroid surgery



Column stabilization



Shoulder surgery



Shoulder surgery in beach chair position



Lithotomic surgery

Ergonomic Design

- The modular design of the W5 satisfies a variety of clinical demands and special posture requirements under different surgical settings.
- Both the wired controller and the control panel on the table are always on standby.
- Unique Pipeline Manager effectively organizes the wires or tubing connected to monitors or anesthesia machines.
- 60mm Antistatic Memory Mattress can avoid pressure sores during the surgical operation.



Hip surgery with traction device in carbon fibre



Femur surgery



D7 Pro Ceiling Pendant



D5 Ceiling Pendant





D9 Ceiling Pendant



Adopting complex porthole die technology on the arm;

Profile section's thickness is up to 17.68mm;

Tensile strength is 285N/mm2;

Yield strength is 234N/mm2;

Passed strict maximum loading test(2.72ton).



Switzerland SKF high

Strength bearings, with quiet, smooth running and long-term reliability dvantages.

Service life of the bearing

About 10000-250000 hours



Combining with the SKF lifting technology from Switzerland, its lifting mechanism can bear heavy load and support lifting distance working, enabling free and easy movement with direction orientation function in the driving system.



Use A16061 aluminum, better performance with the oxidation protection treatment on the surface.

Air source terminal passed plug durability test(30000 times).

Passed strict pressure test



The engineer fully considerate the structure while designing the performance of the cabinet. Cable management and storage tank design make it more compact.

The interfaces of the gas sources and power supply is designed to maximize the space utilization.



Drag chain design to prevent air leakage caused by gas circuit turning and short circuit caused by cable damage.

Double bearing and double track design enable more stable of translation.

The reading lamp was designed for enable patients to read in the evening, no influence to other patients.

Multi-color backlight design help meet with patients of different backlight-color preference.

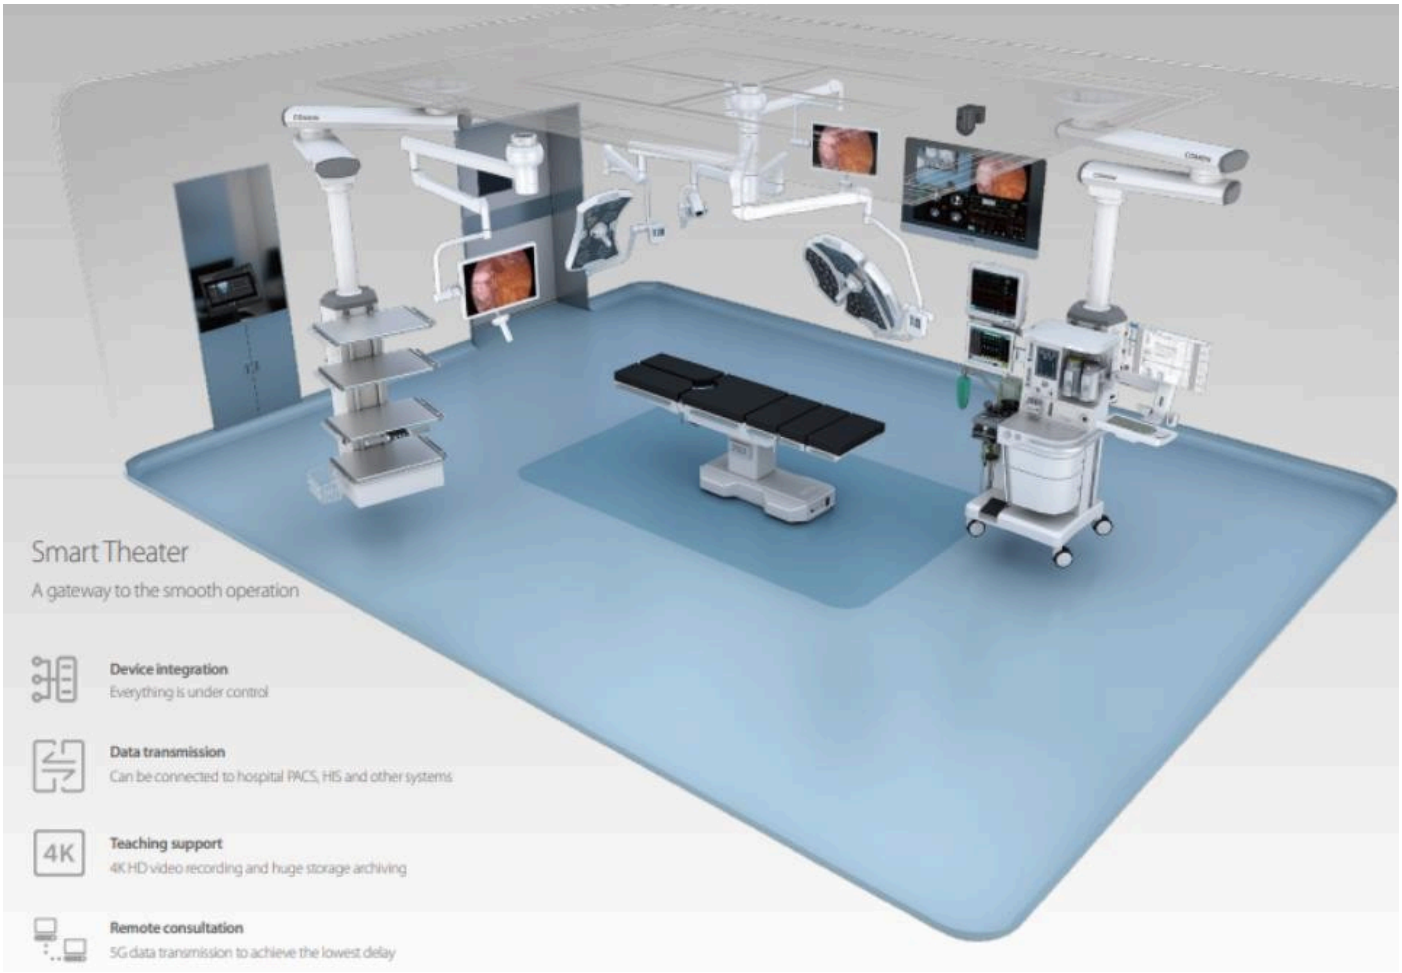



Comprehensive ICU Solution

V8
Ventilator







Advanced Breathing Support



CPR Assisting Tool

Facilitate clinical CPR process

- Two-step Activation
- Shield non-related alarm



Efficacious Oxygenation Precise Evaluation

ROX
Provide accurate evaluation for patient who is receiving HFNC treatment

OSI
Provide accurate evaluation for ARDS

RSS
Important reference for respiratory disease

S/F
Assist oxygenation index assessment in the absence of arterial blood gas analyzer

Double Drive System

Peumatic Driven + Electric Driven

Powerful Gas Delivery System



Standby AIR Gas source

High-performance VS-10 Turbine

Faster response | Lower noise | Longer life span | Maximum flow rate ≥ 210L/min



V3
Ventilator



Extensive Respiratory Management

V3 has a comprehensive range of ventilation modes and special features that meet the requirements of intensive care respiratory therapy.

It fully supports the various treatment needs of ICU, PACU, RICU, EICU, PICU and other wards.




Patient type


Waveform easurement tool


Automatic alarm limit

Benefit from the intuitive UI design of V3, it only takes two steps to adjust ventilation parameters.

Easy to Use

Screen can be flipped to obtain the best viewing angle for operation.



V1
Ventilator



Advanced Tools
ICU-grade support

Most Comprehensive Ventilation Mode.
V1 provides same ventilation mode as ICU ventilators. It becomes more adaptive to multi-types of patient. Which result in an efficient tool that makes different during transport.



42+ Parameters
Monitoring parameters provides immediate feedbacks which makes decision faster.

PEEPi | TVi | P0.1 | V'max | MVspn | fspn

PulmoView
The PulmoView function is an animated lung that shows compliance, patient trigger and resistance in real time.



More Efficient Algorithm.
The IntelliSyncTec algorithm enables smooth synchronization.



High-performance Turbine

The integrated high-performance turbine provides pneumatic performance that can match any compressed-airbased ICU ventilator. The built-in pow unit can not only generate higher pressure but also support continuous O2 concentration.

[Auto] Expiratory Trigger

- Comfort the patient in breathing
- Improve the man-machine synchronization
- Reduce the frequency of ventilator adjustment



EV Series
Emergency & Transport Ventilator

EV5



Advanced Parameters Monitoring

EV5 supports real time monitoring of SpO2 and EtCO2 during emergency transport ensures much safer and consistent ventilation.



Elaboration Improves Usability

Comen's EV5 provides responders with an in-depth overview of the patient's current ventilation status and respiratory functions through spirometry loops, establishing a reliable data basis for when prompt decision-making is required.

5 waveforms:
P-T | F-T | V-T | CO_2-T | SpO_2-T

3 pulmonary loops:
P-V | P-F | F-V

EV3



- Lightweight with only 1.4KG
- 3.5" Intuitive Interface
- One Step Setting
- Intelligent Voice Guidance
- Waveform Display

EV2



- Lightweight with only 0.7KG
- One Step Setting
- Continuous monitoring of airway pressure
- Intelligent Voice Guidance

EN 1789 Certified

EV Series passed 0.75M drop test and acquires EN 1789 certificate. The EV Series accompanies your patients seamlessly whether in or outside the hospital.

IP34 Rating

Equipped with IP34 Ingress protection, the EV Series effectively prevents the ingress of liquids from any direction, especially crucial in complex outdoor environments.

Extreme Cold Test

EV Series successfully passed the operation test in the extreme environment, and can be working even in the -16℃ extreme cold environment.

Long-lasting Operation Support

EV3&EV5: supports up to 10 hours of continuous operation.

EV2: 130 hours with a disposable battery, and 60 hours with a rechargeable battery.

NF5

High Flow Heated Respiratory Humidifier



Simple and practical

- Ultra-Large touch screen: NF5 is equipped with a 4.3-inch touch screen, which allows easy and quick operation by touch and navigation knob.
- Electronic Air-O2 mixer system: easy to set up flow rate and O2 concentration.
- Intuitive UI design: large font, easy for caregiver to operate and observe.
- Optional SpO2 monitoring, ease evaluation of the effectiveness of HFNC.



Safe and comfortable

- High performance turbine, no need for compressed air supply.
- Integrated battery for transportation.
- Light and compact medical trolley ease intra-hospital transport.

Safe and comfortable

- Multi-position temp monitoring: NF5 is equipped with 3 temp sensors, which enable real-time temp monitoring, synchronized closed-loop feedback, joint high temp alarm, smart water level management and over-temp protection function to ensure safer heating.
- High-performance nasal cannula: ergonomic design, soft and comfortable, free of constriction.
- Ultra-quiet design: The ultra-quiet turbine significantly reduces noise, provides a quiet O2 therapy environment, reduces irritability.

CVL series

Video Laryngoscope



HD Display

The 3" screen supports high resolution up to 640*480.

Free Rotation

The screen can be horizontal rotated 270° and vertical rotated 180° to adapt to different angles of use.

Ergonomic Design

The blade adopts ergonomic design and specialized curvature to easily fit different airways.

Excellent View

CVL series is equipped with HD CMOS camera which provides high resolution up to 1-megapixel. Anti-fog treatment which provide clear view at every angle.

Various Blade Sizes





MX8900/M800/ME900

Infusion Workstation System Syringe Pump / Infusion Pump





Seamless Multi-channel Relay

The user-defined sequence portfolios (S1-S12), realizes auto multi-channel relay in order. Sequences are able to be activated synchronously, allowing different drugs delivery at the same time.



One-stop Management

Support collective calculation of total volume.

Support occlusion pressure, bubble size, accumulative bubble alarm unified setting.

Support nurse call and file export.

Flexible Combination, Various Applications

The modular, plug-and-play design brings the greatest flexibility of combination for various infusion scenarios, with expansion of slots from 2-24 infusion pumps.



Wards | Transfer | NICU | ICU/OR



Main controller

Easier operation by centralized management



Slave controller

Receives order from main controller, and provides one-cord charging



Portable Handle

Allows to be carried by hand

Pharmacokinetic Models:

Marsh & Schnider for Propofol administration on adults.

Kataria & Paedfusor for Propofol administration on pediatrics.

Minto, for Remifentanil and Gepts for Sufentanil.

Administration in delivery targets: TCI Effect or Plasma Control Modes.





M300/500
Syringe Pump



Dual-channel cascade

The dual-channel design of M500 provides a relay mode that not only allows for simultaneous injection of multiple drugs, but also cascade administration of the same drug to achieve continuous drug infusion. The maximum continuous single infusion is 120 ml of drug solution.

Extensive drug library

M500 provides a library of 2100 drugs and is customizable for new entries, giving medical personnel essential drug options for infusion records to ensure medication safety.

Continuous titration

The infusion parameters setting can be changed without stopping it.

Functionally Extensive. Clinically Inclusive.

10 different working modes with wider setting ranges:

Rate/Time/Weight-Drip/Dose Time/Intermittent/Ramp/Micro/First Dose/Sequential

- Safer for pediatric/neonatal use
- Smooth & flexible workflow - up to 9 phases of ramp up/down and up to 10 sequential setups available
- Rates of up to 2000ml/h
- Infusion Time up to ~100hrs

M260/ME660
Syringe/Infusion Pump



Capable of blood transfusion, medication and nutrition infusions.

EN1789

Meet the requirements for the equipping of road ambulances used for the transport and care of patients.

IP44

Have protection against solid objects bigger than 1 mm and prevent splashing water from all directions.



ME600 Infusion Pump

Shorten the Stay, Improve the Recovery Quality.

- Integrated 25°C -40°C heating panel
- Protect patients from perioperative hypothermia which lead to poor quality of recovery.
- Maintaining flow rate, prevent increased resistant of flow caused by low temperature

1
Crank

Crank



MANUAL HOSPITAL BED



Dilengkapi 4 roda **dengan rem**



Dilengkapi dengan sebuah tuas untuk menyesuaikan posisi tempat tidur

Papan kepala dan **kaki terbuat dari ABS** yang kuat dan mudah dibersihkan, mudah dipasang dan dilepas





Pelindung samping yang mudah digunakan

Terbuat dari bahan material yang **kuat dan ringan**



Spesifikasi :

Konstruksi terbuat dari besi hollow
Alas kasur terbuat dari baja lembaran
Tinggi / rendah diatur secara manual dengan tuas
Dilengkapi 4 roda dengan rem
Dimensi : 2120(P) x 1000(L) x 500(T) mm

2 Crank | Crank | Crank



MANUAL HOSPITAL BED



Dilengkapi 4 roda **dengan rem**



Dilengkapi dengan dua buah tuas untuk menyesuaikan posisi tempat tidur,

Papan kepala dan **kaki terbuat dari ABS** yang kuat dan mudah dibersihkan, mudah dipasang dan dilepas





Pelindung samping yang mudah digunakan

Terbuat dari bahan material yang **kuat dan ringan**



Spesifikasi :

Konstruksi terbuat dari besi hollow
Alas kasur terbuat dari baja lembaran
Tinggi / rendah diatur secara manual dengan tuas
Dilengkapi 4 roda dengan rem
Dimensi : 2120(P) x 1000(L) x 500(T) mm

3 Crank | Crank | Crank | Crank



MANUAL HOSPITAL BED



Dilengkapi 4 roda **dengan rem**



Dilengkapi dengan tiga buah tuas untuk menyesuaikan posisi tempat tidur,

Papan kepala dan **kaki terbuat dari ABS** yang kuat dan mudah dibersihkan, mudah dipasang dan dilepas





Pelindung samping yang mudah digunakan

Terbuat dari bahan material yang **kuat dan ringan**



Spesifikasi :

Konstruksi terbuat dari besi hollow
Alas kasur terbuat dari baja lembaran
Tinggi / rendah diatur secara manual dengan tuas
Dilengkapi 4 roda dengan rem
Dimensi : 2120(P) x 1000(L) x 480/720(T) mm

3 Crank | Crank | Crank | Crank

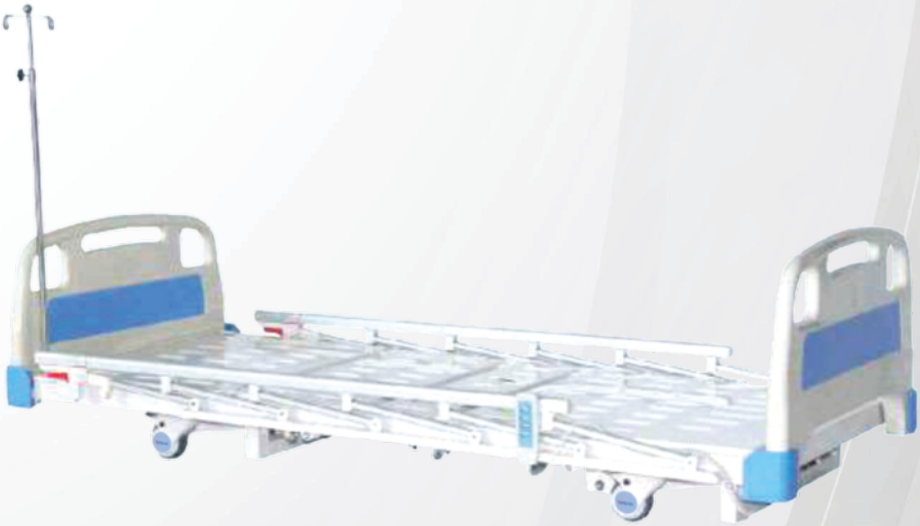

HOSPITAL BED ELECTRIC KY305



Dilengkapi 4 roda **dengan rem**



Dilengkapi dengan remote untuk menyesuaikan posisi tempat tidur

Papan kepala dan **kaki terbuat dari ABS** yang kuat dan mudah dibersihkan, mudah dipasang dan dilepas





Pelindung samping yang mudah digunakan

Terbuat dari bahan material yang **kuat dan ringan**



Spesifikasi :

Konstruksi terbuat dari besi hollow
Alas kasur terbuat dari baja lembaran
Sistem tenaga cadangan (UPS)
Tinggi dan rendah dengan sistem motor
Dimensi : 2130(P) x 1000(L) x 200/600(T) mm





HOSPITAL BED ELECTRIC BUTTERFLY KY302D









Spesifikasi :

Konstruksi terbuat dari besi hollow
Alas kasur terbuat dari baja lembaran
Tinggi / rendah diatur secara manual dengan tuas
Dilengkapi 4 roda dengan rem
Dimensi : 2070(P) x 1000(L) x 480/720(T) mm



BUBBLE AIR MATTRESS WITH PUMP

KEMENKES RI AKL 20902128891

BUBBLE AIR MATTRESS

130 Sel gelembung

Tutup Ujung, Kit Perbaikan, Selang 1,5 M

Bahan: PVC warna Beige

Ketebalan PVC: 0,3 mm

Berat Kasur: 2,2-2,5 kg

Ukuran: 200 x 90 x 7 cm

Kapasitas Berat: 120-130 kg

1 Karton = 6 Unit

SILENT AIR PRESSURE PUMP

Pasokan Power : ~ 110V / 220V, 50 / 60 HZ

Keluaran Udara : 4 - 6 Liter / Min

Rentang Tekanan : 50 mmHg - 120 mmHg

Waktu Siklus : 12 Menit

Konsumsi Daya : 7W

Sekering : 1A

Ukuran : 23,5 x 11,9,5 cm

Berat : 0,72 kg

Kualitas PVC Medis

Tekanan Bisa Diatur

Mengurangi Nyeri

Material Berkualitas

Gelombang Bergantian

Mudah Dibawa

Bunyi Senyap

Watt Rendah

MATRAS LIPAT PASIEN

UNTUK BED PASIEN 3 CRANK



Matras ranjang pasien merupakan alas tempat tidur yang ditempatkan pada ranjang pasien, seperti rumah sakit, klinik, puskesmas dan lain-lain. Matras ini dapat dilipat, bisa untuk ranjang pasien 2 dan 3 crank.

- Warna cream
- Cover kulit calf sintetis
- Bahan busa/foam Density 21
- Cover bisa dibuka dengan resleting
- Terdapat 4 varian
- Bisa untuk ranjang pasien 2 dan 3 Crank

MATRAS LIPAT 4 ONEHEALTH 193 X 84 X 8 CM
MATRAS LIPAT 4 ONEHEALTH 193 X 84 X 10 CM
MATRAS LIPAT 2 ONEHEALTH 193 X 84 X 8 CM
MATRAS LIPAT 2 ONEHEALTH 193 X 84 X 10 CM



HERNIA AID WITH PAD

CELANA HERNIA DENGAN PAD LEMBUT

Memberi topangan kuat dan nyaman
Memliki 2 dudukan plastik
Tali kaki berbahan elastis dan lembut
Panel depan yang fleksibel
Memiliki pad disisi kanan dan kiri yang bisa dilepas.

Tersedia Size :

S : 76.2 - 88.9 cm
M : 88.9 - 104.1 cm
L : 104.1 - 116.8 cm
XL : 116.8 -129.5 cm



KEMENKES RI AKL 10805320885



URINE BAG TYPE T

KEMENKES AKL 10805028353

Model / Type : Tipe-T dengan gantungan

Kapasitas : 2000 ml / 2 Liter.

Memiliki skala volume

Memiliki pengatur pengeluaran urine / urine Cross Valve



URINE BAG

KEMENKES AKL 10805028353

Push Pull Type

Volume 2000 ml

Front film is transparent

Back film is white

1 pack = 10 pcs

1 carton = 25 pack



HOT WATER BAG

KEMENKES AKL 10903220123

Ukuran : 2000 ml

Warna : Hijau, Biru, Merah, Kuning

1 Carton : 50 pcs



URINAL

KEMENKES AKD 10903220295

Spesifikasi :

Bahan plastik polypropylene

Kapasitas 1000 ml

Ketebalan 1 mm

Dilengkapi pegangan

1 Karton 50 pcs

100% INDONESIA

UMBILICAL CORD CLAMP

KEMENKES RI AKL 10902322126





STERILE EO

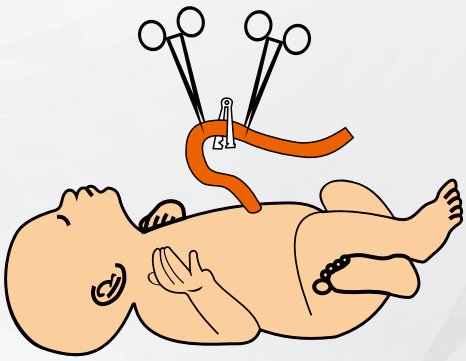

Sterile
Used for clamping the umbilical cord
of newly born babies
Made from non-toxic, medical grade PVC
Permanent locking system to
prevent clamp reopening
Finger grip to facilitate easy
holding and locking of the clamp
- 50 Pcs / Box
- 1 Ctn = 25 Box

DISPOSABLE COLOSTOMY BAG

KEMENKES AKL 10805122388

Untuk 1 x Pakai
Nyaman di kulit
Ukuran 2, 3, 4, 5 cm
1 Pack = 10 pcs
1 Karton = 100 Pack

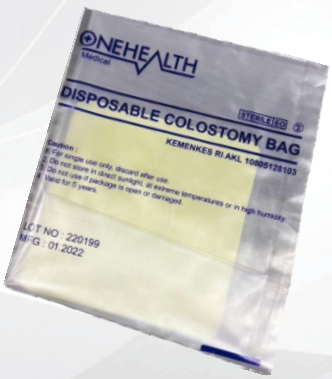



COLOSTOMY BAG WITH DRAINAGE

KEMENKES AKL 10805122388

Kantong Model ditutup dengan klem, dapat dikuras
Warna plastik : Putih susu transparan
Disesuaikan dari 13 mm hingga 64 mm
Nyaman di kulit
Tidak mudah lepas
1 kotak = 10 pcs
1 Karton = 20 kotak



COLOSTOMY BAG KIDS WITH DRAINAGE

KEMENKES RI AKL 10805420210

40mm
Hydrocolloid baseplate
Cartoon Style
Velcro Closure
Hanya untuk sekali pemakaian.
1 Box : 10 pcs
1 Ctn : 40 Box



VAGINAL SPECULUM

KEMENKES AKL 10805028353

- Untuk sekali pakai, Steril EO
- Bahan plastik bening transparan
- Kuat, aman dan halus
- Menghindari resiko cross infection
- Untuk pemeriksaan ca cervix pendarahan, keputihan, dll
- Tersedia ukuran S/M/L
- 1 ctn : 100pcs



IDENTIFICATION BRACELET

KEMENKES AKL 10805028353

- Film PVC medis tidak beracun
- Tahan air, tahan lembab, anti jamur
- Panjang 17cm
- Warna : Kuning, Merah, Biru, Hijau, Pink, Putih
- 1 Box : 100 pcs
- 1 Ctn : 50 Box



ONE JELLY

KEMENKES RI AKL 20903322712

- Bahan dasar air, tidak berminyak, transparan
- Mudah dibersihkan
- Tidak menyebabkan iritasi
- Untuk lubrikasi permukaan gynaecologi dan pemeriksaan menggunakan alat bedah atau untuk lubrikasi vagina jika diperlukan.
- Berat 82gr
- 1 Ctn : 80 Pcs



MUCUS EXTRACTOR

KEMENKES RI AKL 20903322141

* Sterile product for single use
* Suitable for obtaining mucus specimen for microbiological examination
* Also suitable for aspiration of secretion from oropharynx of new born babies to ensure free respiration
* Soft, frosted and kink resistant PVC tubing
* Atraumatic, soft, rounded and open tip
* Clear transparent container permits visual examination of aspirate



HOT & COLD PACK

KEMENKES RI AKL 11403320900

* Alat support terapi atau kompres yang dapat digunakan untuk panas dan dingin sesuai kebutuhan.
* Gunakan PANAS untuk mengendurkan otot dan mengurangi rasa sakit.
* Gunakan DINGIN untuk membantu mengurangi pembengkakan dan peradangan.
* Size : 23*13 cm
* Outerbag Material : Nylon Taffeta
* Infilling : Glycerol
* 1 Carton : 50 Pack



URINE CONTAINER NS 60ml

* Ukuran 60 ml
* Warna tutup kuning
* Non Steril
* Jenis tutup : Ulir
* 1 Box : 50 pcs
* 1 Ctn : 500 pack

SILICONE FOLEY CATHETER

KEMENKES RI AKL 20805320837



Spesifikasi :

Ukuran : 14FR,16FR, 18FR, 20FR, 22FR, 24FR
Telah disteril dengan etilen oksida
1 Box : 10 Pcs
1 Carton : 50 Box



SILICONE STOMACH TUBE

KEMENKES RI AKL 20405320836

Ukuran : 8FR,10FR, 12FR, 14FR, 16FR, 18FR
Bahan silicone
Untuk satu kali pakai
Telah disteril dengan etilen oksida
Non-toxic & non-pirogenik
1 Box : 10 Pcs
1 Carton : 200 Pcs

MD STERILE EO 49°C -15°C CE 0123

10 PCS

1x Pakai



LATEX FOLEY CATHETER

KEMENKES AKL 20805122571



Berbahan
LATEX

Type 2-Way
Standard





Panjang
bagian bawah
340mm

Spesifikasi :

Ukuran : 6FR, 8FR, 10FR, 12FR, 14FR,
16FR, 18FR, 20FR, 22FR, 24FR
Volume : 30 ml
Telah disteril dengan etilen oksida
1 Box : 10 Pcs
1 Carton : 50 Box

SCAN ME

MD LATEX STERILE EO -15°C 49°C CE 0123

50 PCS

1x Pakai

SUCTION CONNECTING TUBE STERILE

KEMENKES RI AKL 20903322082

* Size : 1/4"
* Length : 3.6M
* For single use only
* Do not resterillize
* Do not expose to temperaturees above 49°C
* Sterile unless package is oppened or damaged
* 1 Pcs / Pack
* 1 ctn = 50 Pcs



SUCTION CONNECTING TUBE STERILE

KEMENKES RI AKL 20903322082

* Size : 1/4"
* Length : 1.8M
* For single use only
* Do not resterillize
* Do not expose to temperaturees above 49°C
* Sterile unless package is oppened or damaged
* 1 Pcs / Pack
* 1 ctn = 50 Pcs



10 PCS

1x Pakai

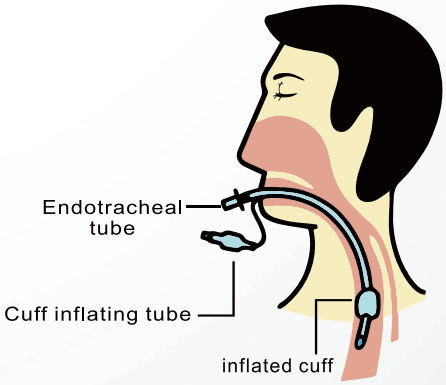



ENDOTRACHEAL TUBE CUFFED

KEMENKES RI AKL 20403321032

* Size : 2mm, 2,5mm, 3mm, 3,5mm, 4mm
  4,5mm, 5mm, 5,5mm, 6mm, 6,5mm, 7mm
  7,5mm, 8mm
* Material : PVC medical grade
* Soft & transparent
* Murphy eye
* High volume low pressure cuff
* 1 Box = 10 Pcs
* 1 Ctn = 10 Box



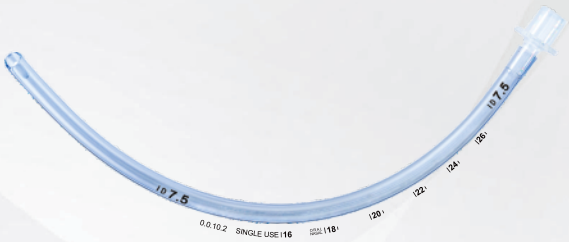

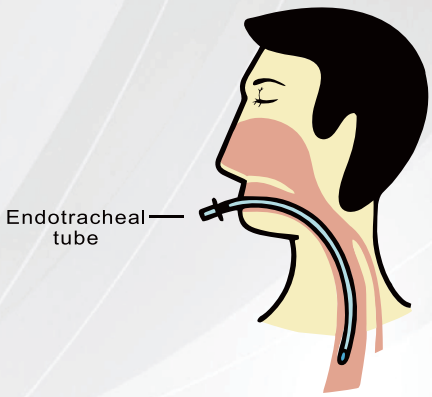

ENDOTRACHEAL TUBE UNCUFFED

KEMENKES RI AKL 20403321188

* Size : 2mm, 2,5mm, 3mm, 3,5mm, 4mm
  4,5mm, 5mm, 5,5mm, 6mm, 6,5mm, 7mm
  7,5mm, 8mm
* Material : PVC medical grade
* Soft & transparent
* Murphy eye
* High volume low pressure cuff
* 1 Box = 10 Pcs
* 1 Ctn = 10 Box



ELECTROSURGICAL PENCIL
NORMAL TYPE
KEMENKES RI AKL 21603420660

Steril
Panjang ujung pensil 4,5 cm
Panjang kabel ± 3m
Hanya untuk sekali pemakaian
Simpan ditempat sejuk dan kering
1 Ctn : 100 pcs





ELECTROSURGICAL PENCIL
LONG TYPE
KEMENKES RI AKL 21603420660

Steril
Panjang ujung pensil 12,5 cm
Panjang kabel ± 3m
Hanya untuk sekali pemakaian
Simpan ditempat sejuk dan kering
1 Ctn : 100 pcs







SUCTION CATHETER

KEMENKES RI AKL 20903221364

Spesifikasi :

- Bahan tube : PVC medical grade
- Ukuran : 6FR, 8FR, 10FR, 12FR, 14FR, 16FR,
- Steril
- Dilengkapi Finger tip control

Cocok digunakan oleh pasien dengan tracheostomi

STOMACH TUBE

KEMENKES RI AKL 20805321088





- Steril
- Hanya untuk sekali pemakaian
- Simpan ditempat sejuk dan kering

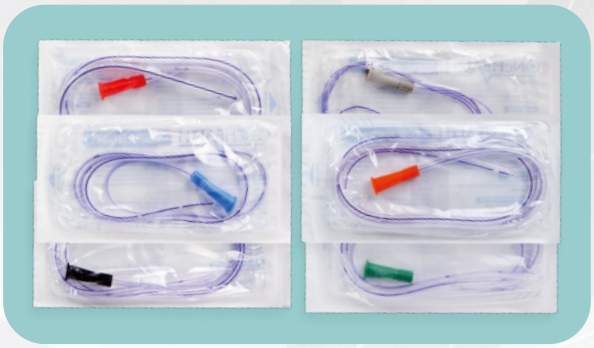

3,5fr (35cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
4fr (40cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
5fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
6fr (40cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
8fr (40cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
8fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
10fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
14fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
16fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
18fr (120cm)	: 1 Box : 30 pcs	1 Ctn	: 300 pcs

FEEDING TUBE

KEMENKES RI AKL 20805321080





- Steril
- Hanya untuk sekali pemakaian
- Simpan ditempat sejuk dan kering



3,5fr (35cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
4fr (40cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
5fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
6fr (40cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
8fr (40cm)	: 1 Box : 100 pcs	1 Ctn	: 1000 pcs
8fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
10fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
14fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
16fr (120cm)	: 1 Box : 50 pcs	1 Ctn	: 500 pcs
18fr (120cm)	: 1 Box : 30 pcs	1 Ctn	: 300 pcs

50 PCS

1x Pakai

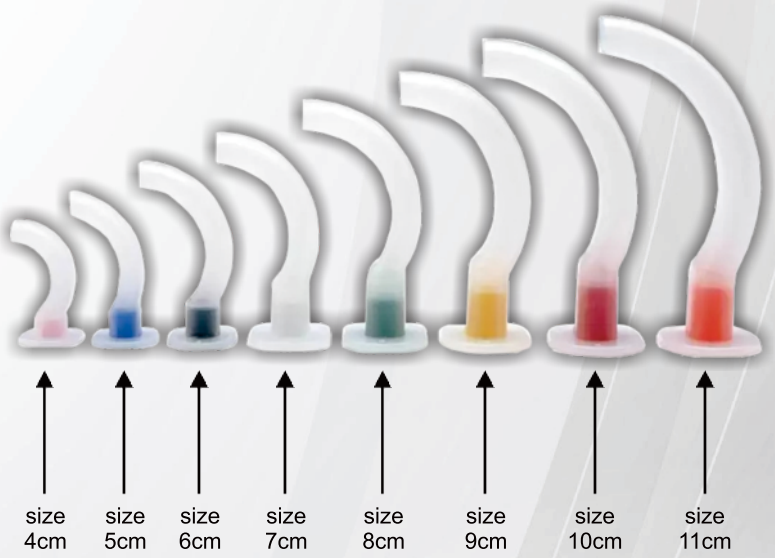



* Suitable for maintaining an unobstructed oropharyngeal airway
* Bite block to prevent biting of tongue and airway occlusion
* Rounded atraumatic edges & smooth airway
* Color coded for easy identification of sizes
* Size : 4cm, 5mcm, 6cm, 7cm, 8cm, 9cm, 10cm, 11cm
* 1 Box = 50 Pcs
* 1 CTN = 10 Box

GUEDEL AIRWAY

KEMENKES RI AKL 10403321094

MEDICAL ULTRASOUND GEL 250 G
KEMENKES AKL 20903024375



Netto : 250 g
1 Karton : 60 botol
Warna Transparan

MEDICAL ULTRASOUND GEL 5 L
KEMENKES AKL 20903024375



Netto : 5 L
1 Karton : 4 Galon
Warna Biru : danTransparan

50 PCS

20 BOX



Directions :

- Positions over tip of penis then unroll the latex sleeve over entire length
- Use adhesive strap around top of sleeve to secure to penis avoiding constriction
- Affix distal end to drainage tubing
- Size S : 25 mm
- Size M : 30 mm
- Size L : 35 mm

1 Box = 50 Pcs
1 Ctn = 20 Box

EXTERNAL MALE CATHETER

KEMENKES RI AKL 10805320607



WHEELCHAIR OH-809B RACING

KEMENKES AKL 114020003

SPESIFIKASI

Sandaran tangan : PVC
Aksesori Kursi & Sandaran : Kain Hitam
Roda Belakang : Solid
Roda Depan : PVC
Pijakan kaki : Aluminium
Aksesori Plastik Lainnya : Hitam
Kapasitas : 100kg
Handrim : Baja
Safety Belt

DIMENSI

Lebar Kursi : 46cm
Tinggi Kursi : 49cm
Roda Belakang : 62cm
Roda Depan : 20cm
Lebar Keseluruhan : 65cm
Tinggi Keseluruhan : 89cm
Berat Kotor : 20.4kg
Berat Bersih : 17.8kg



WHEELCHAIR OH-809 STANDAR

KEMENKES AKL 114020003

Specification :

Chromed steel frame
Fixed armrest
Fixed footrest
Solid castor
Solid rear wheel

MAIN PARAMETERS (cm)

106		87	
64		38	
46		100	
58		94x23x89	
20		N.W.16.7 kg	
49		G.W.19 kg	



WHEELCHAIR OH-809B WITH INFUSION HANGER

KEMENKES AKL 114020003

Specification :

Chromed steel frame
Fixed armrest
Fixed footrest
Solid castor
Solid rear wheel
Infusion hanger

MAIN PARAMETERS (cm)

	106		87
	64		38
	46		100
	58		94x23x89
	20		N.W.16.7 kg
	49		G.W.19 kg



MANUAL WHEELCHAIR OH-875

KEMENKES RI AKL 11402220070

Specification :

Frame	:	Steel
Frame Color	:	Powder Coating
Armrest	:	Fixed, PVC
Seat	:	PVC
Footrest	:	Fixed
Footplate	:	Black Plastic
N.W	:	15.5 kg
G.W	:	17.5 kg
Dim	:	915 X 210 X 870 mm



COMMODE WHEELCHAIR OH-2IN1

KEMENKES RI AKL 10903322717

SPESIFICATION

- With Steel Frame
- PVC Armrest
- Black Leather Cushion
- Solid Rear Wheel
- PVC Black
- Front Wheel Aluminium
- Footrest
- Safety Belt

DIMENSION

Quantity : 1 Pc
Nett Weight : 18 Kg
Gross Weight : 21.3 Kg
Dimension : 94 x 28 x 88 cm



COMMODE WHEELCHAIR OH-2IN1 RACING

KEMENKES RI AKL 11402320899

SPESIFICATION

- With Steel Frame
- PVC Armrest
- Black Leather Cushion
- Solid Rear Wheel
- PVC Black
- Racing Wheel (PU Mag Rear Wheel)
- Front Wheel
- Aluminium Footrest
- Safety Belt

DIMENSION

Quantity : 1 Pc
Nett Weight : 18 Kg
Gross Weight : 21.3 Kg
Dimension : 94 x 28 x 88 cm



COMMODE WHEELCHAIR OH-3IN1 STANDAR

KEMENKES AKL 11402020258

Specification :

Foldable chromed steel frame
Solid castor and rear wheel
U shape commode seat
Detachable armrest and elevating footrest
Reclining high back

MAIN PARAMETERS (cm)

	115		129
	64		79
	44		100
	58	DIM	107x33x78
	20	NW GW	N.W.25.6 kg
	53		G.W.29.3 kg



COMMODE WHEELCHAIR OH-3IN1 RACING

KEMENKES AKL 11402020258

Specification :

Foldable chromed steel frame
Solid castor and rear wheel
U shape commode seat
Detachable armrest and elevating footrest
Reclining high back

MAIN PARAMETERS (cm)

	115		129
	64		79
	44		100
	58	DIM	107x33x78
	20	NW GW	N.W.25.6 kg
	53		G.W.29.3 kg



VARIAN WARNA



TRAVEL WHEELCHAIR KY/DY800

KEMENKES AKL 11402220157

Specification :

Portable travel wheelchair

Self-lock brake

Flip up armrest

Foldable legrest

Front 5" PVC caster

Rear 8" PVC wheel

Total Length	:	78 cm
Total width	:	49,5 cm
Total Height	:	91 cm
Seat Width	:	39 cm
Seat Height	:	49 cm
Backrest Height	:	36 cm
Seat Depth	:	38 cm
Frame material	:	Steel
Front Caster	:	5 inch
Rear Wheel	:	8 inch
Load Capacity	:	100 Kg



VARIAN WARNA



TRAVEL WHEELCHAIR KY/DY813

KEMENKES AKL 11402220153

Specification :

Aluminium transfer wheelchair
Half folding backrest
Auto-lock united brake
Fixed armrest
Flip up legrest
Front 6"pvc caster
Rear 12" PU wheel

Total Length	: 100 cm
Total width	: 63 cm
Total Height	: 91 cm
Seat Width	: 46 cm
Seat Height	: 48 cm
Backrest Height	: 45 cm
Seat Depth	: 39 cm
Frame material	: Aluminium
Front Caster	: 6 inch
Rear Wheel	: 12 inch
Load Capacity	: 100 Kg



ELECTRIC SMARTWHEEL KY-124

KEMENKES RI AKL 21402127186

Specification :

Frame Material : Steel
Frame Color : Gold Powder Coating
Footrest : Pvc
Seat : Nylon
Max User Weight : 120kg
Max Kecepatan : 6-8 (km/jam)

Dimension :

Panjang Total : 114mm
(dgn Kaki Dilepas 810mm)
Lebar Total : 670 Mm
Tinggi Total : 880mm
Lebar Kursi : 460mm
Total Berat : 34,5kg
Roda Depan : 8 Inci
Roda Belakang : 12 Inci
Daya Tertingkat : 250w*2
Kapasitas Tertingkat : 15/12/20ah
Tegangan Tertingkat : Dc24v
Daya Listrik : 50/60hz

Mudah dilipat



DELUX WHEELCHAIR KY/DY-863LAJ

KEMENKES RI AKL 11402220366

Specification :

Block Steel Wheelchair
Powder Coated Color
With Handbrake
Fixed Armrest
Flip-up Footrest
Plastic Footplate
N.W : 13,3 Kg
G.W : 14,5 Kg
Dim : 80 X 25 X 76 cm



Rem tangan Depan dan belakang pegangan anti slip



Ban karet padat



Pijakan kaki



Diameter roda 20" mampu menopang beban max 100 kg



Rangka baja tebal



Tas penyimpanan belakang





Rem tangan
pegangan anti slip



Ban karet padat



Diameter roda 15 cm



Rangka aluminum tebal

KY/DY - 9144L ROLLATOR

KEMENKES RI AKL 11402320546

Specification :

Aluminum Frame
6" Pvc Castors

N.w : 7 Kg
G.w : 9 Kg
Dim : 62 X 20 X 84,5 Cm





Rem tangan
pegangan anti slip



Ban karet padat



Diameter roda 19 cm



Rangka aluminum tebal

KY/DY - 9148L-A ROLLATOR

KEMENKES RI AKL 11402320546

Specification :

Aluminum Frame
6" Pvc Castors

N.w : 7,3 Kg
G.w : 8,3 Kg
Dim : 64 X 28 X 102 Cm



Brake



Manual wheelchair with water resistant removable cover



24" Solid Spoke Wheel Carrying Capacity Max 175 kg



8" PVC Front Wheel



Adjustable Removable leg rests addition



Foldable Manual Wheelchair with removable leg rests

KY/DY - 951AC-56
HEAVY DUTY WHEELCHAIR

KEMENKES RI AKL 11402320665

Frame : Steel
Frame Color : Chrome
Armrest : Flip up, PU
Seat : Nylon, cushion
Footrest Detachble & Elevating
Footplate : Aluminium
N.W. 21.2 Kg
G.W. 23.2 Kg
DIM. 90 x 35 x 88 CM



Brake



Nylon Seat



With foldable Backrest





Detachable Footrest



22" PU Spoke Wheel Carrying Capacity Max100 kg



6" PVC Front Wheel

KY/DY - 980AC-35
STEEL CHILDREN WHEELCHAIR

KEMENKES RI AKL 11402320660

- Foldable Backrest
- Steel Frame
- Green Powder Coating
- Flip Up
- PU Armrest
- Nylon
- N.W. 16,4 Kg
- G.W. 18,5 Kg
- DIM. 80 x 33 x 70 CM



OH - 958LC - A

KEMENKES RI AKL 11402320498

Feature	:	45° 4 Adjustable Seat and 95° - 175° Adjustable Backrest
Frame	:	Aluninum
Frame Colour	:	Light Blue Liquid Coating
Armrest	:	Adjustable, PU
Seat	:	Blue and Black Cushion
Footrest	:	Dethacable & Elevating
Footplate	:	Black Plastic
Brake	:	/



CEREBRAL PALSY KIDS OH-985

KEMENKES RI AKL 11402320498

Spesifikasi

Rangka kursi solid steel
Sandaran kepala bisa disetel
Sandaran tangan yang bisa dilepas
Pijakan kaki
Kastor padat
Roda MAG pneumatik
Sudut kursi disesuaikan
Sabuk pengaman
Lebar tempat duduk : 37 cm untuk anak
Lebar tempat duduk : 43 cm untuk dewasa
Muatan maksimum 75 kg



FOOD TABLE KY-574A

PNP Ke Semua Kursi Roda :

KY / DY 809
KY / DY 809 B
KY / DY 875
KY / DY 609 U
KY / DY 609 GCU

1 KOLI = 3 PCS



FOOD TABLE KY-561

1 KOLI = 5 PCS







SHOWER CHAIR KY-797L

Rangka Aluminium berkualitas
Beban Maksimal 100 Kg
Bisa disetel tinggi rendah
Anti slip
Nyaman di pakai
1 Koli = 4 Pcs







SHOWER CHAIR KY-798LQ

Rangka Aluminium berkualitas
Beban Maksimal 100 Kg
Bisa disetel tinggi rendah
Terdapat sandaran
Anti slip
Nyaman di pakai
1 Koli = 4 Pcs



WALKER KY/DY912L
Kemenkes AKL 11402020257

MAIN PARAMETERS (cm)

	50	DIM	58x18x82
	44	PCS/ CTN	4
	78-96	N.W. G.W.	N.W.5.5 kg G.W.6.7 kg







WALKER KY/DY913L
Kemenkes AKL 11402020257

MAIN PARAMETERS (cm)

	47	DIM	53x17x81
	46	PCS/ CTN	4
	78-96	N.W. G.W.	N.W.4.8 kg G.W.5.7 kg



WALKER KY/DY919L
Kemenkes AKL 11402020257

MAIN PARAMETERS (cm)

	47	DIM	53x17x81
	46	PCS/ CTN	4
	78-96	N.W. G.W.	N.W.4.8 kg G.W.5.8 kg



COMMODE CHAIR KY/DY894
Kemenkes AKL 10903020749

Foldable chromed steel frame

▼ MAIN PARAMETERS (cm)

	48		43
	45		33
	44-45	DIM	50x21x76
	78-88	NW | GW	N.W.6 kg | G.W.7 kg



COMMODE CHAIR KY/DY696
KEMENKES AKL 11402126536

Foldable chromed steel frame

▼ MAIN PARAMETERS (cm)

	57		42
	55		29
	44-54	DIM	50*17*79
	74-84	NW | GW	N.W 7 kg | G.W 8 kg

KY/DY - 822L COMMODE CHAIR

KEMENKES RI AKL 10903322174

5 in 1 Functional
Shower Chair, Walker,
Commode Chair, Lifting Aid,
Toilet Seat Raiser

Thread Handrail
Non-Slip and Safer

Two Ways to Use
Fixed and Interactive

8 Levels of Adjust
For different heigh groups



Aluminum
53 x 47 x 76-96 cm
5,3 kg



BESIDE CABINET

KEMENKES RI AKL 11402320498

- Terbuat dari material ABS / Aluminum
- Gagang Aluminum pada bagian atas
  Memudahkan untuk digerakan
- Gantungan handuk Aluminum

OVERBED TABLE



- Dapat digunakan ketika pasien duduk di kursi roda
- Kerangka besi stainless steel
- Papan meja kayu lapis melamin
- Mudah dibersihkan dan tahan debu
- Dapat diangkat dengan mudah dan diatur ketinggiannya
- Dilengkapi dengan roda diameter 5cm
- Dapat menahan berat hingga 25kg secara merata
- Ukuran meja 81x41
- Dapat diatur tinggi dari 80-110cm


KY/DY926


KY/DY932


KY/DY924


KY/DY921

QUAD CANE

Kemenkes AKL 11402020405


KY/DY931


KY/DY934


KY/DY943

▼ MAIN PARAMETERS (cm)

MODEL NO.	HIGHT (cm)	DIM	N.W (kg)	G.W (kg)	PCS/CN
KY926	74-97	78x29x36	0.76	8.7	10
KY932	74x97	78x29x43	0.88	9.7	10
KY924	65-88	72x30x34	0.8	9.2	10
KY921	72-95	79x34x44	0.87	10.4	10
KY931	72-95	79x34x44	0.9	10.6	10
KY934	65-88	72x30x34	0.78	9.1	10
KY924	84	85x22x40	0.9	10	10

WALKING STICK

KEMENKES AKL 11402126627


KY/DY9201L KY/DY927L



▼ MAIN PARAMETERS (cm)

MODEL NO.	HIGHT (cm)	DIM	N.W (kg)	G.W (kg)	PCS/CN
KY9201L	71-94	65x15x28	7,7	8,3	20
KY927L	81-94	61x12x28	6,8	7,8	20



WALKING STICK
Kemenkes AKL 11402020559

▼ MAIN PARAMETERS (cm)

MODEL NO.	HIGHT (cm)	DIM	N.W (kg)	G.W (kg)	PCS/CN
KY920L	71-94	65x15x26	0.36	7.7	20
KY933L	95 126	95x29x31	0.57	12.1	20
KY938L	77-100	79x29x18	0.32	7.5	20
KY928L	77-100	79x29x18	0.35	7.9	20



UNDERARM CRUTCH
KEMENKES AKL 11402020406

▼ MAIN PARAMETERS (cm)

MODEL NO.	HIGHT (cm)	DIM	N.W (kg)	G.W (kg)	PCS/CN
KY925L(S)	95-115	101x33x29	0.73	16.7	20
KY925L(M)	115-135	119x33x29	0.82	18.4	20
KY925L(L)	135-155	140x33x29	0.88	19.7	20



Handle Nyaman
Terdapat Tali
Pada Pegangan



Ujung Tongkat
Berbahan karet
Anti Slip



Tongkat Tunanetra KY936L

KEMENKES RI AKL 11402320661

TIMBANGAN analog



MOTIF



H150



H151



H152



H153

MAX.130kg

Specification :

Capacity	130 kg
Graduation	1000 g / 2 lb
Dimensions of the scale	24.3 x 26.8 x 4.2 cm
Dimensions of the box	28.4 x 26.7 x 4.5 cm
Packing Volume	58 x 27.5 x 25 cm
N.W.	12.5 kg
G.W.	14 kg
PCS / CTN	10 pcs

BR 2015

KEMENKES AKL 10901021113

TIMBANGAN DIGITAL

MOTIF





EB 9360

Specification :

Capacity	150 kg
Graduation	100 g / 0.2 lb
Dimensions of the scale	30.2 x 26.5 x 2.7 cm
Dimensions of the box	33.2 x 28.7 x 4.3 cm
Packing Volume	35 x 30 x 19.2 cm
N.W.	6.4 kg
G.W.	7.5 kg
PCS/CN	5 pcs
LCD Size	74 x 28.5 mm
Battery	1 x CR2032
On/Off	Auto On
Indicators	Lo / Err
Technology	4 sensor



MAX.150kg



Indicator



Battery 1.5V AAA

Tempered Glass 6mm I Auto On/off I Technology 4 Sensor

KEMENKES AKL 10901021163

TIMBANGAN DIGITAL



MAX.180kg

Lo/Err

Indicator

AAA

Battery 1.5V AAA

Specification :

Capacity	180 kg
Graduation	50 g / 0.1 lb
Dimensions of the scale	30.2 x 30.2 x 2.2 cm
Dimensions of the box	33.5 x 32.6 x 4.3 cm
Packing Volume	34.8 x 34.3 x 23.8 cm
N.W.	7.6 kg
G.W.	9.2 kg
PCS/CN	5 pcs
LCD Size	74 x 40 mm
Battery	2 pcs x 1.5V AAA
On/Off	Auto On
Indicators	Lo / Err
Temperred Glass	6 mm



MOTIF

EB 5633

Tempered Glass 6mm I Auto On/off

KEMENKES AKL 10901020865

TIMBANGAN GLASS DIGITAL

EB1612H





5390

Specification :

Unit Size	: 30.2 x 30.2 x 2.2 cm
Material	: Tempered Glass
Max Capacity	:150 kg
Division	: 100g
Sensor	: Auto Zero, Zero Off
Indicator	: Low Battery
	: Overload Indicators

1 Carton : 5 pcs
Kode : 5674, 5675, 5385, 5613, 5390



5673



5675



5385



5674

KEMENKES RI AKL 10901021115

TIMBANGAN DIGITAL **EB3429**





F026



F025



F024

Specification :

Unit Size	: 28 x 28 cm
Max Capacity	: 180 kg
Division	: 50g
High Precision	: 50g
Scale Size	: 28 x 28 x 2.2 cm
LED size	: 20.6cm
Auto On	: Low Battery
	: Overload Indicators

1 Carton : 5 pcs
Kode : FO24, F025. F026

KEMENKES RI AKL 10901320610

OH741H

BODY FAT & HYDRATION MONITOR SCALE

Alat Ukur Kadar Lemak & Kadar Air



BLACK



BLUE



Product Design	: Body Fat & Hydration Monitor Scale
Capacity/Division	: 180kg/100g
Measurement range	: 2kg-180kg
Units available	: kg/lb
Product dimension	: 31x31x3.3cm
Batteries	: 2x1.5VAAA
Approval	: CE, ROHS
Color	: Black and Blue
1 Carton	: 5pcs

- Always use the scale on a solid and flat surface.
- The glass will be slippery when it is wet. Keep it dry!
- DO NOT strike, shake or drop the scale.

KEMENKES RI AKL 20502320868

TIMBANGAN BR9015A analog



MAX.120kg

MOTIF

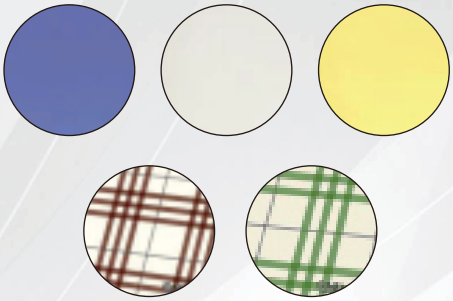

Specification :

Capacity	120 kg
Graduation	1000 g / 2 lb
Dimensions of the scale	25.7 x 26.3 x 5 cm
Dimensions of the box	27.2 x 26.5 x 5.5 cm
Packing Volume	57.5 x 28 x 29 cm
N.W.	14.2 kg
G.W.	16 kg
PCS/CN	10 pcs

KEMENKES AKL 10901021164

TIMBANGAN DT 602 analog



Specification :

Capacity	136 kg
Graduation	500 g / 1 lb
Dimensions of the scale	43 x 28.5 x 8.3 cm
Dimensions of the box	47 x 30 x 9.9 cm
Packing Volume	50.3 x 33 x 32.5 cm
N.W.	9.6 kg
G.W.	11.3 kg
PCS / CTN	3 pcs

MAX.136kg

KEMENKES AKL 10901020715

TIMBANGAN BAYI
RGZ-20A



MAX.20kg

Varian Warna

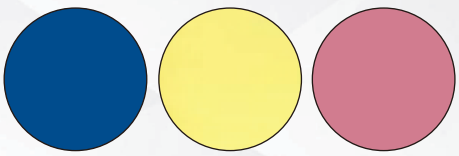

Spesifikasi :

Rentang pengukuran : 0 - 20 kg
Material Bahan : Besi dan Plastik
Beban Minimal : 0.5kg
Beban Maksimal : 20kg
Pembagian Berat : 0 -10 kg, 10 - 20 kg
Dimensi Keseluruhan 58 x 33 x 18,5 cm
Varian Warna : Biru, Kuning, Pink
Berat Kotor : 4 Kg
Berat Isi : 3.1 Kg
Kelengkapan : 1 x alat, 1 x tray / Nampan (54 x 22 cm)

KEMENKES AKL 10901220049

TIMBANGAN BAYI
B01



Spesifikasi :

Product Size	:	595 x 321 x 115 mm
Material	:	ABS Plastic
Capacity	:	20 kg D = 10 g
Unit	:	Kg / oz / lb : oz
LCD Size	:	65 x 30 mm
Power	:	2 x 1.5V AAA battery

KEMENKES AKL 10901220123

MAX.160kg





Spesifikasi :

Rentang pengukuran berat 0 - 160 kg
kenaikan berat per 0.5 kg
ukuran pijakan timbangan : 38,5 x 28 cm
Dimensi produk 90 x 35 x 30,5 cm

RGZ-160
WEIGHING SCALE

KEMENKES AKL 10901220053



MAX. 200 kg

Product Specification

Capacity : 200 Kg, Graduation value : 50 G
Minimum weighing : 1 Kg
Heigh meter measuring range : 70-90 Cm, Graduation value : 5 mm
Working voltage : AC : Adapter 6V 1000 mA
Working temperature : 5°C ~ 40°C, relative humidity ≤ 90% RH
Storage temperature : -20°C ~ 50°C, relative humidity ≤ 90% RH
Basic weighing function : reset, tare, unit conversion
Unit conversion : Kg, Lb
Weighing related instruction
Low voltage automatic shutdown function
Charging indicator
Overweight alarm indication
Weight update rate : 15 times / second
Packing size : 80*35*19 Cm, 1 pcs / carton
G.W : 9.5 Kg
N.W : 8 Kg
Certificate : CE, ISO9001

RCS-200
DIGITAL WEIGHING SCALE

KEMENKES RI AKL 10901220050



WIRELESS BODY HEIGHT METER

HT-721

Measuring Range : 5cm to 200 cm
Accuracy : -+ 0.1cm
Screen Display : LCD size 35x16 cm
Power : 2 pcs AAA battery
Features : Buzzer Prompt
: One Button Operation
: Low Battery Indicator
1 Carton : 12 pcs
Colour : Green and Blue



STAND AND HEAD PIECE SLIDER

ALAT PENGUKUR TINGGI BADAN

- Skala Jelas Dan Akurat
- Alas Kaki Lebar Dan Tebal
- Mudah Dalam Pemasangan
- 1 Ctn = 10 Pcs



OD-235

WAIST RULLER



Alat Ukur : Lingkar Pinggang, Lengan, Dada Dll

Panjang = 150 cm
Praktis mudah digunakan
1 Pcs / Box
1 CTN = 360 Pcs

STATURE METER

ALAT PENGUKUR TINGGI BADAN

- Alat Ukur Tinggi Badan
- 0 - 200 Cm
- Penggunaan praktis dipaku ke dinding
- 1 Box = 20 Pcs
- 1 Ctn = 100 Box

DIGITAL HEIGHT & WEIGHT SCALE

KEMENKES RI AKL 10901420011









- Intelegence weighing scales
- View multiple body fat data
- LCD display monitor
- Automatic step on

Unit Size : 26 x 26 cm
Unit : KG
1 Carton : 1 pcs

Max Capacity : 180 kg
Material : Tempered Glass
Display Mode : LCD



TOURNIQUIET

KEMENKES AKL 11604220002

Panjang : 40 cm

Elastis, Mudah digunakan

Safety, Mudah Dibersihkan

5 Pilihan Warna

1 Karton = 400 pcs



MORTAR

SKP FR.03.02/VA/02869/2022

DIAMETER	QUANTITY
6 cm	240 Pcs
8 cm	100 Pcs
10 cm	54 Pcs
13 cm	36 Pcs
16 cm	20 Pcs

WOODEN TONGUE DEPRESSOR

KEMENKES AKL 10903220260

Panjang : 15 cm

Hanya untuk sekali pakai

Untuk Mulut dan Tenggorokan

1 Box = 50 pcs

1 KARTON = 100 pcs



2 Pcs

15 Box





Spesifikasi :

- Bahan Plastik dan karet
- Panjang Maks 100 cm
- Kemasan 1 box isi 2 pcs
- Kemasan 1 ctn isi 15 box

BW-C Stature Gauge

Pengukur Tinggi (Untuk Bayi)

FR.03.02/VA/02731/2023

NEUROLOGICAL REFLEX HAMMER



TAYLOR TYPE

KEMENKES RI AKL 11001320143

Palu Reflex untuk pemeriksaan dasar neurologis bantalan karet empuk sehingga tidak nyeri pada pasien.

Weight: 150g
Type : Taylor
Color : Red, Green, Blue, Black, Orange
1 Box : 25 Pcs
1 Carton : 4 Box



BUCK TYPE

KEMENKES RI AKL 11001320143

Palu Reflex untuk pemeriksaan dasar neurologis bantalan karet empuk sehingga tidak nyeri pada pasien.

Weight: 150g
Type : Buck
Color : Red, Green, Blue, Black, Orange
1 Box : 25 Pcs
1 Carton : 4 Box

AUTOMATIC BLOOD PRESSURE MONITOR
ARM TYPE

KF-65D







Unit Dimension	:	123 x 98 x 49 cm
LCD Dimension	:	44 x 44 cm
Battery	:	4 x AAA Alkaline Batteries
Memory Bank (Users)	:	192 x 2 Users
Arm Circumference	:	23 - 33 cm / 22 - 42 cm
Blood Preassure Measurement Range	:	0 - 280 mmHg
Sensor Accuracy	:	± 3 mm Hg
Pulse Measurement Range	:	40 to 199 Beats / Minute
Pulse Accuracy	:	± 5 %
1 Box	:	1 Pcs
1 Ctn	:	30 Pcs





Temperature Humadity Clock

HYGROMETER DIGITAL HTC 2

PENGUKUR KELEMBAPAN

- Temperature Measuring Range : -10°C to 70°C (-14°F ~ 158°F)
- Temperature Measuring Accuracy : +/- 1°C (1.8°F)
- Temperature Resolution : +/- 0.1°C (0.2°F)
- Humidity measuring range : 10% to 99% RH
- Humidity measuring accuracy : +/-5% RH
- Humidity resolution : 1%RH
- Battery : AAA 1.5V
- 1 Ctn = 100 Pcs



ONEHEALTH Digital Blood Pressure Monitor KF-65A
KEMENKES AKL 20501026370

Display : Large HD digital screen

Cuff size : 23-33 cm

Power : DC 6v/500 mA

Battery : 4*AA Alkaline Batteries

Function : Measuring and monitoring blood pressure of human body

Measurement method : Oscillographic determination

Working type : Automatic measurement

Memory : 2*192 sets

Pulse rate display range : 40-199 times/minute

Detection range : 0.0 kPa – 37.3 kPa (0 mm Hg – 280 mm Hg)

Accuracy : ±0.4 kPa (±3 mmHg)

1 carton = 16 pcs

ONEHEALTH Digital Blood Pressure Monitor KF-65C
KEMENKES AKL 20501026139

Display : Large LCD screen

Cuff size : 23-33 cm

Power : DC 6v/500 mA

Battery : 4*AA Alkaline Batteries

Function : Measuring and monitoring blood pressure of human body

Measurement method : Oscillometric method

Working type : Automatic measurement

Memory : 2*192 sets

Pulse rate display range : 40-199 times/minute

Detection range : 0.0 kPa – 37.3 kPa (0 mm Hg – 280 mmHg)

Accuracy : ±0.4 kPa (±3 mmHg)

1 carton = 16 pcs



DIAGNOSTIC PENLIGHT

ABS SHELL PORTABLE WITH CLAMP





Model : Diagnostic Penlight
Bulb : Halogen Bulb
Size Mainbody : 127mm * 15mm
Weight : 12g
Battery : 2*AAA
Light : Yellow
Color : Red, Green, Blue, Grey
White, Black, Orange
1 Box : 50 Pcs
1 Carton : 10 Box

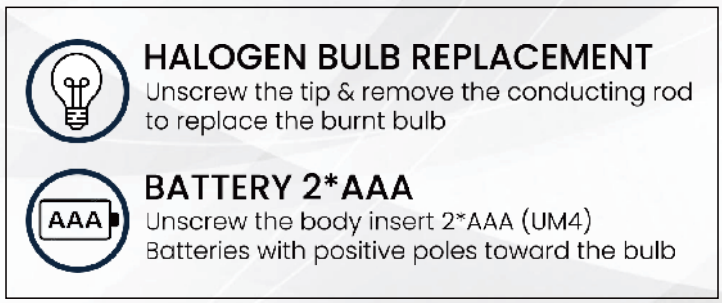

KEMENKES RI AKL 10903322609

DIAGNOSTIC PENLIGHT

ABS SHELL PORTABLE WITH CLAMP





Model	: Diagnostic Penlight
Bulb	: LED Bulb
Size Mainbody	: 127mm * 15mm
Weight	: 12g
Battery	: 2*AAA
Light	: White
Color	: Red, Green, Blue, Grey White, Black, Orange
1 Box	: 50 Pcs
1 Carton	: 10 Box

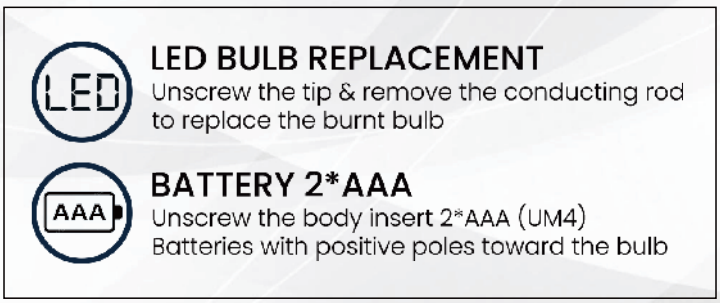

KEMENKES RI AKL 10903322609

PENLIGHT OTOSCOPE

HS-402F2



- Lampu LED Sangat Terang & Tahan Lama
- Baterai 2*AAA
- Waterproof IP54

Model : Penlight Otoscope
Bulb : LED Bulb
Weight : 100g
Battery : 2*AAA
Light : White

1 Carton : 100 Pcs

KEMENKES RI AKL 10903322548

PENLIGHT STAINLESS STEEL

HS-401F2



- Lampu LED Sangat Terang & Tahan Lama
- Baterai 2*AAA
- Waterproof IP54

Model	: Penlight Stainless Steel
Bulb	: LED Bulb
Size Mainbody	: 136mm * 12mm
Weight	: 14.3g
Battery	: 2*AAA
Light	: White

1 Box : 50 Pcs
1 Carton: 5 Box

KEMENKES RI AKL 10903322620

20	5
Pcs	Box



PULSE OXIMETER (FS-10C)

KEMENKES AKL 20502124440

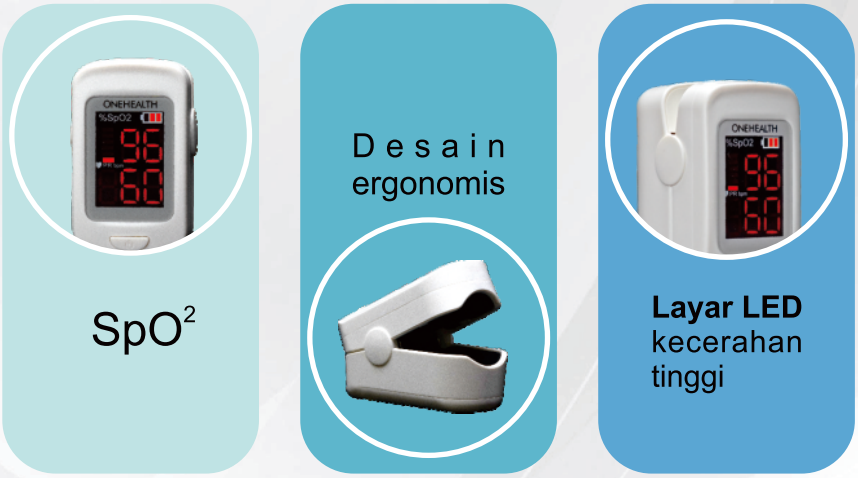

Spesifikasi :

Colour : Black & White
Led Colour Display
User Friendly Design
Low Power Consumption
Suitable For Adult
1 Box = 20 pcs
1 karton = 5 box

20	5
Pcs	Box



PULSE OXIMETER (FS-10F)

KEMENKES AKL 2050212 4378







Spesifikasi :

Colour : White
Led Colour Display
User Friendly Design
Low Power Consumption
Suitable For Adult

1 Box = 20 pcs
1 karton = 5 box



PULSE OXIMETER FINGERTIP JPD-500D

KEMENKES RI AKL 20502320971

Unit dimension	: 133*36*13.6mm
Unit weight	: 23g
Power	: Battery CR2032
Measurement range	: 32.0°C~42.9°C
Accuracy	: -+ 0.1°C
Unit of measure	: 0.1°C / 0.1°F
1 Box	: 10 Pcs
1 Ctn	: 240 Pcs



Spesifikasi :

SpO2 Measuring
Brightness Adjustable
Alert Function
Multiple Display Modes
Pulse Rate Measuring
4 Direction Display



PULSE OXIMETER CHILDREN OH-500H

KEMENKES RI AKL 20502320950

Display	: HD OLED Screen 4 display directions 6 display modes
Measurement range	: 35-100%
Accuracy	: 70-100%; -+2%;35%-69% no definition
Measurement range	: 25 bpm to 250 bpm
Pulse Intensity	: Bar graph indicator
Power	: 2AAA alkaline batteries
Operation temperature	: 5-40°C
Storage temperature	: 10-50°C
Ambient humidity	: 15-80%, no condensation in operation 10%-93%, no condensation in storage
1 Box	: 1 pcs
1 Ctn	: 100 Pcs



Spesifikasi :

SpO2 Measuring

Brightness Adjustable

Alert Function

Multiple Display Modes

Pulse Rate Measuring

Design For Child

HANDHELD
PULSE OXIMETER



KEMENKES RI AKL 20502320662

Dimensions: 72X142X31mm
Weight About: 200g (just equipment)

SpO2
Measurement range :70~100%
Accuracy: ±2%(70~100%),0~69% unspecified
Resolution: 1%

Pulse Rate
Measurement range: 25-250 bpm
Accuracy: ±3 bpm
Resolution: 1bpm

Alarm Function
Audible and visual alarms for high/low SpO2 and pulse rate
Low Signal Quality Alarm, Low-battery indicator
Alarm limits adjustable by user
Pitch-Tone technology for pulse beep and alarm beep

Compatible with lithium batteries
and standard “AA” size batteries
Rechargeable lithium battery with 1800 mAh



DIGITAL THERMOMETER DT-01
KEMENKES AKL 20901027920

Ketepatan Akurasi ±0.1°C

Rentang Pengukuran : 32.0~42.9°C

Skala minimum : 0.1

LCD Display 20 x 7.5 mm

Fungsi Notifikasi (Beep)

Otomatis Padam

Baterai : 1.5V Button Battery (LR/SR-41)

Memory : Hasil pembacaan terakhir

1 Karton = 200 pcs

ELASTIC BANDAGE
KEMENKES AKL 10902027626

SIZE : **7.5 cm x 4.5 m**
1 CTN : 480 ROLLS

SIZE : **10 cm x 4.5 m**
1 CTN : 360 ROLLS

SIZE : **15 cm x 4.5 m**
1 CTN : 240 ROLLS

Skin Color

Two Elastic Button

1 Pack : 12 Pcs



DT-101B

60 sec Reading Time

Flexible Tip

OFF Auto Shut-off

Waterproof





DIGITAL FLEXIBLE THERMOMETER

- 60 Second reading time
- Memory recall of last measurement
- Flexible Tip
- Waterproof
- Fever Alarm
- Low battery Indicator
- Auto shut off
- Oral, Armpit & rectal temperature measurement

Unit dimension	: 124,5*19*10mm
Unit weight	: 9g
Power	: Battery LR41
Measurement range	: 32.0°C~42.9°C
Accuracy	: -+ 0.1°C
Unit of measure	: 0.1°C / 0.1°F
1 Box	: 12 Pcs
1 Ctn	: 288 Pcs

KEMENKES RI AKL 20901420009

DT-111G



CUTE DIGITAL THERMOMETER

Animal Edition

- 10 Second reading time
- Flexible Tip
- Waterproof
- Memory recall of last measurement
- Fever Alarm
- Low battery Indicator
- Auto shut-off
- Oral, Armpit & rectal temperature measurement





Unit Dimension	: 153,5*24*16mm
Unit Weight	: 13g
Power	: Battery LR41
Measurement Range	: 32.0°C~42.9°C
Accuracy	: -+0.1°C
Unit of Measure	: 0.1°C / 0.1°F
1 Box	: 10 Pcs
1 Ctn	: 200 Pcs

KEMENKES RI AKL 20901420010

DT-K111i

10 Sec Reading Time

Flexible Tip

OFF Auto Shut-off

Waterproof



3 Colors Fever Alarm



DIGITAL THERMOMETER

With Large Backlight Screen

- 10 Second reading time
- Memory recall of last measurement
- Flexible Tip
- Waterproof
- Fever Alarm in 3 Colors
- Low battery Indicator
- Auto shut off
- Oral, Armpit & rectal temperature measurement

Unit dimension	: 133*36*13.6mm
Unit weight	: 23g
Power	: Battery CR2032
Measurement range	: 32.0°C~42.9°C
Accuracy	: -+ 0.1°C
Unit of measure	: 0.1°C / 0.1°F
1 Box	: 10 Pcs
1 Ctn	: 240 Pcs

KEMENKES RI AKL 20901420006

FR-203



INFRARED THERMOMETER

Non-contac Forehead Mode

- Child Mode
- Silent Mode
- Professional Accuracy
- Smart Fever Alert
- 20 Reading Memory Recall
- Non-contac Forehead Mode

Forehead mode	: 35-42.2°C±0.2°C
Object mode	: 0-100.0°C±1.0°C
Memory storage	: 20 Sets data
Auto shutdown	: 10s
Battery	: AAAx2
1 Box	: 12 Pcs
1 Ctn	: 288 Pcs

KEMENKES RI AKL 20901420021

FR-304



EAR INFRARED THERMOMETER

- Child Mode Measurement
- Silent Mode
- 10s Auto Shut Off
- Smart Fever Alert
- 20 Reading Memory Recall
- Magnetic Probe Cap
- LCD Screen Display

Ear Mode	: 34-43°C±0.3°C
Display	: HD LCD Display
FCL/20	: 320
Memory storage	: 20 Sets data
Auto shutdown	: 10s ± 1s
Battery	: AAA*2
Temperature Units	: °C / °F Adjustable
1 Box	: 1 Pcs
1 Ctn	: 100 Pcs

KEMENKES RI AKL 20901420016

HS-20A

KEMENKES AKL 20501220358







BLACK



PINK



BLUE



DARK BLUE



UNGU



GREY

- Gauge / Manometer Bahan Aluminium
- Cuff Berbahan Nilon
- 2 Kantung Bladder Bahan PVC
- Standard PVC Buld
- Valve Pencegah Udara yang Akurat
- Tas Nilon yang Mudah disimpan
- Warna : Pink, Blue, Dark Blue, Ungu, Grey, Black

HS-20 C

KEMENKES AKL 10501220388

ANEROID
SPHYGMOMANOMETER



SOFT
COTTON CUFF



- Special Alumunium Aloy Manometer
- Classic Cartoon new Born Cotton Cuff
- Classic Cartoon Child Cotton Cuff
- 2-Tube new Born size PVC Bladder
- Standard PVC Bulb
- Dual use air Release Valve with Spring
- Tapper End Valve
- Cartoon Zipper Bag with Ear



HS-70E

ANEROID SPHYGMOMANOMETER STANDING

KEMENKES RI AKL 20501220491

SPESIFIKASI :

- Layar Besar 5,45"
- Memiliki Wadah / keranjang untuk menyimpan manset
- Dilengkapi dengan stand yang dapat disesuaikan tinggi rendahnya
- Terdapat 5 kaki model bintang dengan 5 roda
- DIM : 80 x 32 x 16,7 cm
- N.W. : 3 kg
- G.W. : 4 kg



HS-70F

ANEROID SPHYGMOMANOMETER STANDING

KEMENKES RI AKL 20501320588

SPESIFIKASI :

- Layar Besar 5,45"
- Memiliki Wadah / keranjang untuk menyimpan manset
- Dilengkapi dengan stand yang dapat disesuaikan tinggi rendahnya
- Terdapat 5 kaki model bintang dengan 5 roda
- DIM : 75 x 22 x 20,5 cm
- N.W. : 4 kg
- G.W. : 5 kg

HS-20 D

KEMENKES AKL 20501220417

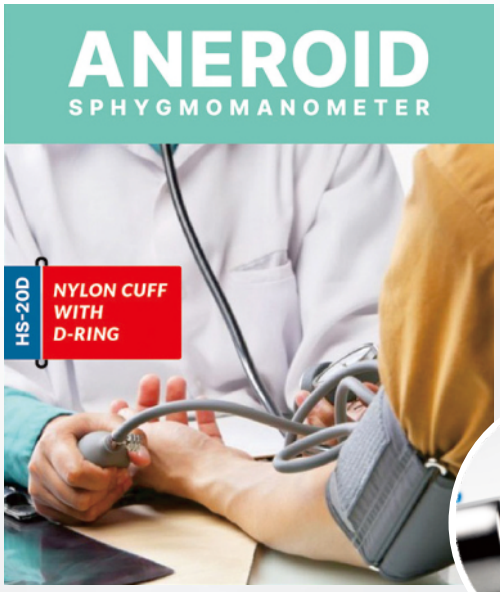





BLACK

- Gauge / Manometer Bahan Aluminium
- Cuff Berbahan Nilon dengan D-Ring
- 2 Kantung Bladder Bahan PVC
- Standard PVC Buld
- Valve Pencegah Udara yang Akurat
- Tas dengan Bahan Vinyl
- Warna : Merah, Biru, Abu-Abu, Hijau, Orange Black, Pink, Ungu



MERAH



BIRU



ABU-ABU



HIJAU



ORANGE



PINK



UNGU





STETHOSCOPE PREMIER HS-30L

KEMENKES RI AKL 10501321083

DUAL TUBE SYSTEM
EXCELLENT ACCOUSTIC
RELIABLE QUALITY
SOFT-SEALING EARTIPS

- Chestpiece perak
- Sisi chestpiece kecil untuk mengauskultasi suara berfrekuensi rendah
- Desain cincin ganda anti dingin
- Bagian chestpiece terbuat dari aluminium alloy
- Tersedia warna Hitam, Merah, Biru Gelap, Hijau, Biru Terang, Pink, Kuning, Abu-Abu, dan Ungu
- 1 Ctn berisi 50pcs

DELUX STETHOSCOPE CHILD HS-30F

KEMENKES RI AKL 10501320990





- Dual - Head Stethoscope For Child
- Applicable For Auscultating of The Hearts and Lungs
- Aluminium Alloy Chest Piece
- Chest Piece diameter 47mm
- Available colors : Black, Dark Blue, Red, Green, Pink, Yellow
- 1 Ctn : 50pcs



Duplex Stethoscope HS-30A1
KEMENKES AKL 10501220389

SPECIFICATION

Single Head Stethoscope

Silver single membrane chestpiece
zing chestpiece 47 mm membrane is sensitive for sound collecting.
Aprodizing aluminium chestpiece
Aluminium alloy chestpiece, good sound conduction
Standard single PVC tube, color is optional
Tube color : black, red, blue, green, yellow, pink, grey.

PACKAGING INFORMATION

Box size : 19.5 x 10 x 2.8 cm
Carton Size : 52.5 x 40.5 x 31 cm
Carton Qty : 100 pcs / ctn
Carton Weight : 13.5 kgs / ctn; 12 kgs / ctn

Delux Stethoscope HS-30B1
KEMENKES AKL 10501220388



SPECIFICATION

Dual Head Stethoscope

Dual head chestpiece
Anodizing aluminium chestpiece,
the 47mm membrane is sensitive for sound collecting.
Apelicable for ausculating of the heart and lungs.
Dual head chestpiece
Anodizing aluminium chestpiece, the 38mm membrane is sensitive for sound and collecting.
Apelicable for ausculating of the heart and lungs.
Aluminium alloy chestpiece good sound conduction.

PACKAGING INFORMATION

Box size : 195 x 100 x 28 mm
Carton Size : 525 x 405 x 310 mm
Carton Qty : 100 pcs / ctn
Carton Weight : 4.5 kgs / ctn; 13 kgs / ctn

FETAL **DOPPLER**



- AUTOMATIC FHR DETECTION
- BIG LCD SCREEN DISPLAY
- BUILT-IN SPEAKER
- AUTOMATIC SHUTDOWN
- VARIABLE VOLUME CONTROL

- Menggunakan 4 buah baterai AA atau menggunakan charger yang sudah tersedia didalam kemasan
- Tampilan layar digital HD yang lebar
- Bisa menyimpan memori
- Menggunakan teknologi Intelegent Pressure
- Dilengkapi dengan teknologi Voice Broadcast dengan bahasa indonesia
- Tampilan layar yang menarik untuk menampilkan kondisi tekanan darah yang normal (hijau) tinggi (kuning) sangat tinggi (merah)
- 1 Pcs / Box
- 1 Ctn : 20 Pcs



MICROSCOPE SLIDES
GROUND EDGES

7101	Thicnkness	1.0 - 1.2 mm
	Size	25.4 x 76.2 mm
	1 Box	72 Pcs
	1 Ctn	50 Box

MICROSCOPE SLIDES
GROUND EDGES

7105	Thicnkness	1.0 - 1.2 mm
	Size	25.4 x 76.2 mm
	1 Box	72 Pcs
	1 Ctn	50 Box



HCG PREGNANCY STRIP TEST
KEMENKES AKL 20101220077

Sensitifitas 20mIU

CEPAT | AKURAT | MUDAH



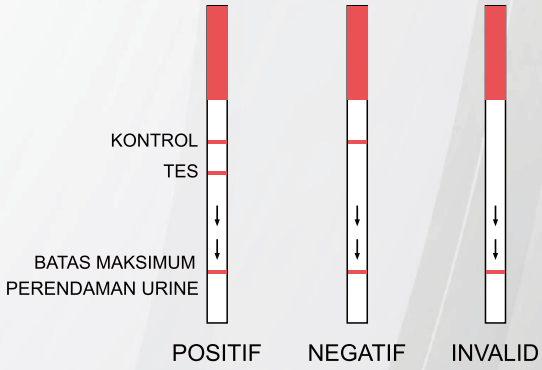

HCG PREGNANCY CASSETTE TEST
KEMENKES AKL 20101220419

CEPAT | AKURAT | MUDAH

Sensitifitas 10mIU

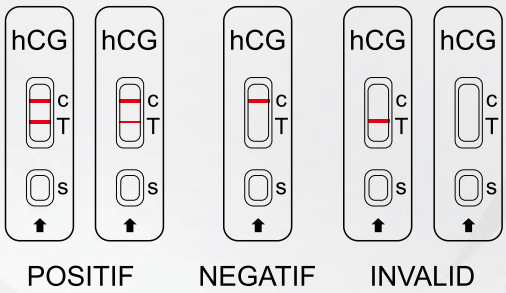



OVULATION (LH) TEST STRIP
KEMENKES AKL 20101324453



- Ovulation (LH) Test Strip
- Mendeteksi masa subur pada wanita
- Untuk sekali pemakaian
- Baca hasil dalam 10 menit
- 1 Box : 100 Pcs
- 1 Ctn : 70 Box

HEARING AID

BEHIND THE EAR INVISIBLE HEARING AID

KEMENKES RI AKL 10702220029





- Audio Noise Reduction
- Low Battery Consumption
- Volume Control
- Super Sensitivity

HEARING AID F-139

ALAT BANTU DENGAR

- Nyaman digunakan
- Dilengkapi 3 karet buds
- Pengaturan Volume Suara
- Suara Jelas dan jernih
- 1 Pcs / Box
- 1 CTN = 200 Pcs





POCKET HEARING AID F-18

ALAT BANTU DENGAR

- Nyaman digunakan
- Dilengkapi 3 pilihan earplugs
- Suara Jelas dan jernih
- 7 mode kontrol volume suara
- Terdapat penjepit di saku celana
- 1 Pcs / Box
- 1 CTN = 200 Pcs

SYRINGE 1 ML SLIP TIP

KEMENKES AKL 20902122997



Spesifikasi :

Ukuran : 26G x $1^1/_2$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 100 Pcs
1 Carton : 32 Box

SYRINGE 3 ML LUER LOCK TIP

KEMENKES AKL 20902122997

Spesifikasi :

Ukuran : 23G x $1^1/_2$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 100 Pcs
1 Carton : 24 Box



SYRINGE 5 ML LUER LOCK TIP

KEMENKES AKL 20902122997



Spesifikasi :

Ukuran : 22G x $1^1/_2$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 100 Pcs
1 Carton : 18 Box

SYRINGE 10 ML LUER LOCK

KEMENKES AKL 20902126257



Spesifikasi :

Ukuran : 21G x $1^1/_2$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 100 Pcs
1 Carton : 12 Box

SYRINGE 20 ML LUER LOCK

KEMENKES AKL 20902220017



Spesifikasi :

Ukuran : 18G x $1^1/_2$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 50 Pcs
1 Carton : 16 Box

SYRINGE 50 ML LUER LOCK

KEMENKES AKL 20902220016



Spesifikasi :

Ukuran : 18G x $1^{1}/_{2}$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 25 Pcs
1 Carton : 16 Box

SYRINGE 50 ML WITHOUT NEEDLE

KEMENKES AKL 20902220016



Spesifikasi :

Ukuran : 18G x $1^{1}/_{2}$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 25 Pcs
1 Carton : 16 Box

SYRINGE 50 ML SIDE POSITION

KEMENKES AKL 20902220016



Spesifikasi :

Ukuran : 18G x $1^{1}/_{2}$"
Hanya untuk sekali pakai
Steril, Tidak beracun
1 Box : 25 Pcs
1 Carton : 16 Box

HYPODERMIC NEEDLE (STERILE)

KEMENKES RI AKL 20902321832





Spesifikasi :

- Untuk satu kali pakai
- Ukuran : 18G, 23G, 25G, 26G, 27G, 30G
- Sterilisasi EO, tidak beracun dan bebas pirogen
- Steril jika kemasan utuh
- 1 Box = 100 Pcs
- 1 Ctn = 100 box

S.I.V CATHETER

KEMENKES RI AKL 20902420077

PEN LIKE TYPE





Spesifikasi :

- Steril
- Non-pyrogenic
- Hanya untuk sekali pemakaian.
- 1 Box : 50 pcs
- 1 Ctn : 40 Box

INFUSION SET DEWASA
KEMENKES AKL 20902220392

Infus Set Dewasa
Jumlah tetesan : 20 drops = 1 ml
Sterilisasi : Ethylene Oxide
Kegunaan : Untuk memberikan cairan infus pada pasien rawat
1 box = 50pcs
1 carton = 8 box





INFUSION SET ANAK
KEMENKES AKL 20902220392

Infus Set Anak
Jumlah tetesan : 60 drops = 1 ml
Sterilisasi : Ethylene Oxide
Kegunaan : Untuk memberikan cairan infus pada pasien rawat
1 box = 50pcs
1 carton = 8 box

INFUSION SET ANAK
AIR-VENT WITH Y CONNECTOR
KEMENKES AKL 20902220382

Infus Set Anak
Jumlah tetesan : 60 drops = 1 ml
Sterilisasi : Ethylene Oxide
Kegunaan : Untuk memberikan cairan infus pada pasien rawat
1 box = 50pcs
1 carton = 8 box





INFUSION SET DEWASA
AIR-VENT WITH Y CONNECTOR
KEMENKES AKL 20902220392

Infus Set Dewasa
Jumlah tetesan : 20 drops = 1 ml
Sterilisasi : Ethylene Oxide
Kegunaan : Untuk memberikan cairan infus pada pasien rawat
1 box = 50pcs
1 carton = 8 box

I.V CATHETER
KEMENKES AKL 20902220295



Size : 14G, 16G, 18G, 20G, 22G
24G, 26G
Sterile
Non-Pyrogenic
Non Toxic
1 Box = 50 pcs
1 Carton = 40 box

Color Code	Size	SPEC (mm)	
		Ø	L
ORANGE	14G	2.0	51
GREY	16G	1.6	51
GREEN	18G	1.2	32
PINK	20G	1.0	32
BLUE	22G	0.8	25
YELLOW	24G	0.7	19
PURPLE	26G	0.65	19

I.V CANNULA WITH INJECTION
KEMENKES AKL 20902322160



Size : 14G, 16G, 18G, 20G, 22G
24G, 26G
Sterile
Non-Toxic
Non Pyrogenic
1 Box = 50 pcs
1 Ctn = 20 box

Color Code	Size	SPEC (mm)		FLOW [ML/MIN]
		OD	L	
ORANGE	14G	2.0	50	≥250
GREY	16G	1.6	51	≥150
GREEN	18G	1.2	45	≥75
PINK	20G	1.0	32	≥55
BLUE	22G	0.8	25	≥25
YELLOW	24G	0.7	19	≥15
PURPLE	26G	0.65	19	≥15

BLOOD TRANSFUSION SET
SET TRANSFUSI DARAH
KEMENKES RI AKL 20902321571

- Untuk satu kali pakai disterilkan dengan EO tidak beracun dan bebas pirogen
- Dilarang melakukan sterilisasi atau penggunaan ulang
- Jangan digunakan jika tutup pelindung tidak kencang, hilang atau jika kemasan rusak
- 1 Box = 50 Pcs
- 1 Ctn = 8 Box



BLOOD TRANSFUSION SET
KEMENKES AKL 20902120417



Designed for transfusion of blood or blood component
medical grade PVC
Spike: With/Without Air vent.
Clear, transparent and flexible drip chamber with 200 micron filter, approximately 20 drops / ml
Accurate flow controller
Luer lock or Luer slip connector
1 box = 50 pcs
1 carton = 8 box



INFUSION SET DEWASA
KEMENKES AKL 20902420208

Steril
Non-Toxic
Non-Pyrogenic
Hanya untuk sekali pemakaian
Simpan ditempat sejuk dan kering
1 Box = 50 pcs
1 Ctn = 400 pcs

LANCING DEVICE
KEMENKES AKL 11603220490

Dilengkapi blood lancet
4 tingkat pengaturan
1 Carton = 500 pcs
4 Box = 125 pcs



100 PCS

200 BOX



BLOOD LANCETS (STERILE LANCETS)

SIZE 21G, 28G, 30G

KEMENKES AKL 11603120155









Spesifikasi :

Badan Utama : PE (Polyethylene)

Jarum : Baja Tahan Karat

Panjang : 32,5+_1,5 mm

Diameter: 6,3+_0,3 mm

1 Kotak = 100 pcs

1 Karton = 200 Kotak









PEN NEEDLES

DISPOSABLE INSULIN

KEMENKES RI AKL 20902322416

Spesifikasi :

32g 4mm
31g 5mm
Non-toxic
Non-pyrogenic
Sterile
Fits most insulin delivery system
Single use only
1 Box : 100 Pcs
1 Ctn : 50 Box

SURGICAL BLADES

KEMENKES RI AKL 11603324670





☑ **STERILE**
☑ **CARBON STEEL**

Pisau khusus untuk bedah.
Tersedia 11 macam, dimulai dari
no : 10, 11, 12, 15, 20, 21, 22, 23, 24.
Material yang digunakan berbahan Carbon Steel.

CHROMIC CATGUT

Steril Surgical Suture with Needle



32mm 1/2 Circle
CURVE CUTTING
75cm



USP 2/0





USP 3/0

- Benang bedah Chromic dikemas dengan 89% isopropanol 10% air dan 1% larutan triethanolamine.
- Benang Chromic diproses dengan larutan garam chromic.
- Untuk digunakan dalam jaringan lunak/litigasi umum, termasuk penggunaan dalam operasi mata, tetapi tidak diperuntukan untuk bedah kardiovaskular atau neurologi.
- Simpan pada suhu ruangan. Hindari paparan suhu tinggi.
- 1 Box : 24 pcs
- 1 Ctn : 50 Box

KEMENKES RI AKL 21603325269

CHROMIC CATGUT

Steril Surgical Suture



Without Needle
150cm



USP 2/0





USP 3/0

- Benang bedah Chromic dikemas dengan 89% isopropanol 10% air dan 1% larutan triethanolamine.
- Benang Chromic diproses dengan larutan garam chromic.
- Untuk digunakan dalam jaringan lunak/litigasi umum, termasuk penggunaan dalam operasi mata, tetapi tidak diperuntukan untuk bedah kardiovaskular atau neurologi.
- Simpan pada suhu ruangan. Hindari paparan suhu tinggi.
- 1 Box : 24 pcs
- 1 Ctn : 50 Box

KEMENKES RI AKL 21603325269

PLAIN CATGUT

Steril Surgical Suture with Needle



32mm 1/2 Circle
CURVE CUTTING
75cm



USP 2/0





USP 3/0

- Benang bedah Plain dikemas dengan 89% isopropanol 10% air dan 1% larutan triethanolamine.
- Benang Chromic diproses dengan larutan garam chromic.
- Untuk digunakan dalam jaringan lunak/litigasi umum, termasuk penggunaan dalam operasi mata, tetapi tidak diperuntukan untuk bedah kardiovaskular atau neurologi.
- Simpan pada suhu ruangan. Hindari paparan suhu tinggi.
- 1 Box : 24 pcs
- 1 Ctn : 50 Box

KEMENKES RI AKL 21603325268

PLAIN CATGUT

Steril Surgical Suture







USP 2/0





USP 3/0

- Benang bedah Plain dikemas dengan 89% isopropanol 10% air dan 1% larutan triethanolamine.
- Benang Chromic diproses dengan larutan garam chromic.
- Untuk digunakan dalam jaringan lunak/litigasi umum, termasuk penggunaan dalam operasi mata, tetapi tidak diperuntukan untuk bedah kardiovaskular atau neurologi.
- Simpan pada suhu ruangan. Hindari paparan suhu tinggi.
- 1 Box : 24 pcs
- 1 Ctn : 50 Box

KEMENKES RI AKL 21603325268

SILK BRAIDED

Steril Surgical Suture with Needle



32mm 1/2 Circle
CURVE CUTTING
75cm



USP 2/0





USP 3/0

- Benang bedah Silk dilengkapi dengan jarum digunakan untuk bedah minor seperti luka trauma atau menjahit luka terbuka lainnya.
- Produk steril selama kemasan masih dalam keadaan tertutup dan tidak rusak.
- Hanya untuk sekali pemakaian.
- 1 Box : 36 pcs
- 1 Ctn : 50 Box

KEMENKES RI AKL 21603325325

SILK BRAIDED

Steril Surgical Suture



Without Needle
500cm



USP 2/0





USP 3/0

- Benang bedah Silk dilengkapi dengan jarum digunakan untuk bedah minor seperti luka trauma atau menjahit luka terbuka lainnya.
- Produk steril selama kemasan masih dalam keadaan tertutup dan tidak rusak.
- Hanya untuk sekali pemakaian.
- 1 Box : 24 pcs
- 1 Ctn : 50 Box

KEMENKES RI AKL 21603325325

NEBULIZER MASK

KEMENKES AKL 10403122284



Ukuran Dewasa, Anak
Kualitas bagus
Cocok untuk inhalasi
Nyaman digunakan
Terdiri dari selang dan masker
Sangat bagus digunakan untuk
wadah hidrogen

OXYGEN MASK

KEMENKES AKL 10403122283



Ukuran Dewasa, Anak , Bayi
Kualitas bagus
Cocok untuk inhalasi
Nyaman digunakan
Terdiri dari selang dan masker
Sangat bagus digunakan untuk
wadah hidrogen

NASAL OXYGEN CANNULA

KEMENKES AKL 10403122322



Soft tip
Ukuran Dewasa, Anak, Bayi
Kualitas bagus
Selang oksigen cocok untuk inhalasi
Sangat bagus digunakan untuk
wadah hidrogen

OXYGEN MASK NON-REBREATHING

KEMENKES RI AKL 10403321316



- Steril
- Untuk sekali pakai
- Simpan di Tempat sejuk dan kering
- Pastikan semua koneksi aman dan udara bersirkulasi dengan bebas ke seluruh ruangan tabung
- Ukuran S.M.L.XL
- 1 Ctn = 100 Buah

100 PCS

20 BOX



SCALP VEIN (WING NEEDLE)

KEMENKES AKL 20902120334

Steril
Hanya untuk 1 kali pakai

Tidak beracun, **dan bebas pyrogen**

Buang setelah **digunakan**

Spesifikasi :

Ukuran : 23G, 25G, 27G
Warna : Biru, Orange, Abu
Bahan : PVC Medical Grade
Panjang Tubing : 31 cm
Sterilisasi : Ethylene Oxide Gas
Isi 1 Box : 100 Pcs
Isi 1 Karton : 20 Box

SCAN ME

THREE-WAY STOPCOCK (WITH EXTENSION TUBE 10CM)

KEMENKES RI AKL 20902322582









Spesifikasi :

Dengan selang tambahan 10cm
Mudah digunakan
Konektor 3 arah
Aliran dapat diatur, dibuka atau ditutup
Sterilisasi Ethylene Oxide Gas
1 Box : 50 Pcs
1 Karton : 20 Box



DOUBLE SPIKE

KEMENKES RI AKL 20902420241

Double spike infusion
Panjang 7 cm
Sterilisasi menggunakan EO gas
Steril selama kemasan belum terbuka
Hanya untuk sekali pemakaian
1 Box : 100 Pcs
1 Ctn : 20 Box

50 Pcs

20 Box



THREE-WAY STOPCOCK (WITH MALE LOCK ADAPTOR)

KEMENKES AKL 20902120165



Konektor 3 arah, **dengan adaptor penguncI yang kuat**

Tidak beracun, **dan bebas pirogen**

Buang setelah, **digunakan**

Spesifikasi :

Mudah digunakan
Konektor 3 arah
Aliran dapat diatur, dibuka atau ditutup
Sterilisasi Ethylene Oxide Gas
1 Box : 50 Pcs
1 Karton : 20 Box

SCAN ME

MESH NEBULIZER

KEMENKES RI AKL 20403321033

M-103







Spesifikasi :

- Catu daya : 3V DC (Dua baterai alkaline "AA" 1.5V), alternatif adaptor daya, masukan : AC100~240V 50 / 60 HZ 0.30A keluaran : DC 5V 1000 mA
- Laju nebulasi : = 0.2 mL / menit
- Residu obat : = 0.5 mL / menit
- Ukuran partikel : MMD Approx. 3.7μm, ± 25%
- Kebisingan : = 50 db (A)
- Frekuensi getar : Sekitar 113kHz
- Masa pakai baterai : tidak kurang dari 1 jam (dua baterai alkaline ”AA” 1.5 V baru digunakan)
- Berat sekitar 97 gram (tidak termasuk baterai)
- Dimensi sekitar : 62 mm (L) x 41 mm (W) x 125mm (H)
- Tingkat kedap air : IPX0
- Kontraindikasi : Tidak ada
- Mode operasi : Operasi berkelanjutan

Partikel Kecil

Kebisingan Rendah

Portable, Mudah Dibawa

Kebisingan Sisa Yang Rendah



SPECIFICATION

Input power : 90VA Power supply : DC 12V ; 44VA

Max negative pressure value : ≥ 0.075Pa

Pumping rate : ≥ 17L / min (7E-A)

Operation noise : ≤ 65db (A)

LOW NOISE

STEPLESS PRESSURE ADJUSTMENT

CONCEALED LIQUID STORAGE BOTTLE

PORTABLE PHLEGM SUCTION UNIT (7E-A)

KEMENKES RI AKL 21603222619

COMPRESSOR NEBULIZER

KEMENKES AKL 20403220117



SPECIFICATION :

Input : 220 / 50Hz
Power Consumption : 180VA
Medication Capacity : 6ml
Respirable Fraction : 0.5 to 5µm 0.5µm 80%
MMAD : 2.0µm
AVG Nebulization Rate : Above 0.2 / min
Noise Level : Below 60 dBA

CPR : 30 - 45 Psi
OPR : 12 - 14.5 Psi (0.85 - 1.1bar)
LFR : 8 - 10 lpm
OTR : 10°C - 40°C (50°F - 104°F)
OHR : 10 to 95% RH
Storage Temperature Range : -10°C - 65°C
Storage Humidity Range : 10 to 95% RH
1 Carton 10 Pcs





OXYGEN REGULATOR KP-905

KEMENKES AKL 10402124478

Gas Type Medical oxygen

Input Pressure 2200 psi

Output Pressure 50 psi

Flow Range 1-15 LPM

Pressure Gauge Size 2 inch / 50 mm

Inlet Connection BS341-3

Outlet Connection DISS 1240

Humidifier Capacity 170 ml

1 Karton = 20 pcs

Memudahkan Dalam Penguncian

OXYGEN REGULATOR KP-907B

KEMENKES AKL 10402122448

Gas Type Medical oxygen

Input Pressure 2200 psi

Output Pressure 50 psi

Flow Range 1-15 LPM

Pressure Gauge Size 2 inch / 50 mm

Inlet Connection BS341-3

Outlet Connection DISS 1240

Humidifier Capacity 170 ml

1 karton = 10 pcs



ELECTRIC SUCTION APPARATUS

7A-23OH

KEMENKES RI AKL 21603325235





- Power Voltage : AC220V, 50Hz
- Max negative pressure : > 80kPa
- Operation noise : <60 dB (A)
- Input power : 180VA
- Max air flow : 30+2 L/min (without jar)
  : 26+2 L/min (with jar)
- Liquid Collection Jar : 2500mL/pc, 2pieces

G.W./N.W. : 15.2/13.5kg
Size : 40.5x40x56cm
1 Ctn : 1 Pcs



OXYGEN GAS CYLINDER 6,7 L + TROLY + REGULATOR

SKIP FR.03.02/VA/07037/2022



Volume
6,7 L (1M3)

Pengencangan kuat dilengkapi ring pengencang **dibagian nepel oksigen**





Bisa digunakan pada tabung Oksigen mana saja **(1m3; 1,5m3; 2m3; 3m3; dan 6m3).**

Spesifikasi Tabung :

Kapasitas 6,7L
Diameter 140 x 4.5 mm
Berat 9.4 Kg
Tinggi 535 mm
Material 37 Mn
Tekanan 15 Mpa
Uji Tekanan 22.5/25 MPa

Spesifikasi Regulator :

Tekanan Masukan 2200 psi
Tekanan Keluaran 50 psi
Rentang Aliran 1-15 LPM
Koneksi Masuk BS341-3
Koneksi Keluar DISS 1240
Kapasitas Humidifier 170 ml

SCAN ME



OXYGEN GAS CYLINDER 13,4 L + TROLY + REGULATOR

SKIP FR.03.02/VA/07037/2022



Volume
13,4 L (2M3)

Pengencangan kuat dilengkapi ring pengencang **dibagian nepel oksigen**





Bisa digunakan pada tabung Oksigen mana saja **(1m3; 1,5m3; 2m3; 3m3; dan 6m3).**

Spesifikasi Tabung :

Kapasitas 13,4 L
Diameter 140 x 4.5 mm
Berat 17 Kg
Tinggi 1085 mm
Material 37 Mn
Tekanan 15 Mpa
Uji Tekanan 22.5/25 MPa

Spesifikasi Regulator :

Tekanan Masukan 2200 psi
Tekanan Keluaran 50 psi
Rentang Aliran 1-15 LPM
Koneksi Masuk BS341-3
Koneksi Keluar DISS 1240
Kapasitas Humidifier 170 ml

SCAN ME



OXYGEN GAS CYLINDER 40 L + TROLY + REGULATOR

SKIP FR.03.02/VA/07037/2022



Volume
40 L (6M3)

Pengencangan kuat dilengkapi ring pengencang **dibagian nepel oksigen**





Bisa digunakan pada tabung Oksigen mana saja **(1m3; 1,5m3; 2m3; 3m3; dan 6m3).**

Spesifikasi Tabung :

Kapasitas 40 L
Diameter 219 x 5,7 mm
Berat 60 Kg
Tinggi 1320 mm
Material 37 Mn
Tekanan 15 Mpa
Uji Tekanan 22.5/25 MPa

Spesifikasi Regulator :

Tekanan Masukan 2200 psi
Tekanan Keluaran 50 psi
Rentang Aliran 1-15 LPM
Koneksi Masuk BS341-3
Koneksi Keluar DISS 1240
Kapasitas Humidifier 170 ml

SCAN ME

Haier Biomedical Line-Up

ULTRA LOW TEMPERATURE (ULT) FREEZER

- **-86°C ULT Freezer**


DW-86W100J


DW-86W420J


DW-86L100J


DW-86L338J


DW-86L388J


DW-86L490J


DW-86L578J


DW-86L628


DW-86L728J


DW-86L828J

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
DW-86W100J	-86°C	100L	769*825*1120	138 Kg
DW-86W420J	-86°C	420L	2130*870*1020	310 Kg
DW-86L100J	-86°C	100L	770*660*810	108 Kg
DW-86L338J	-86°C	338L	823*900*1871	238 Kg
DW-86L388J	-86°C	388L	830*980*1980	255 Kg

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
DW-86L490J	-86°C	490L	873*900*1980	295 Kg
DW-86L578J	-86°C	587L	903*980*1960	300 Kg
DW-86L628	-86°C	626L	1035*900*1980	301 Kg
DW-86L728J	-86°C	728L	1049*980*1980	345 Kg
DW-86L828J	-86°C	828L	1145*980*1980	380 Kg

BIOMEDICAL FREEZER

- **-40°C, -30°C & -25 °C Biomedical Freezer**


DW-40L92


DW-40L262


DW-40L278


DW-40L348


DW-40L508


DW-40W100


DW-40W255


DW-30L420F


DW-25L92


DW-25L262

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
DW-40L92	-40°C	92L	640*610*810	46 Kg
DW-40L262	-40°C	262L	700*705*1665	88 Kg
DW-40L278	-40°C	278L	770*710*1810	115 Kg
DW-40L348	-40°C	348L	790*845*1860	137 Kg
DW-40L508	-40°C	490L	940*845*1860	164 Kg

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
DW-40W100	-40°C	100L	685*650*810	43 Kg
DW-40W255	-40°C	255L	1243*724*838	70 Kg
DW-30L420F	-30°C	420L	950*920*1900	195 Kg
DW-25L92	-25°C	92L	640*610*810	46 Kg
DW-25L262	-25°C	262L	700*705*1665	88 Kg

COMBINED REFRIGERATOR & FREEZER


HYCD-282


HYCD-282A

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HYCD-282	Refr: 2°C to 8°C Frez: -10°~-40 °C	Refr: 185L Frez: 97L	736*660*1810	145 Kg
HYCD-282A	Refr: 2°C to 8°C Frez: -10°~-40 °C	Refr: 185L Frez: 97L	736*660*1810	145 Kg

TRANSPORT COOLER


HZY-5B


HZY-35B


HZY-8Z


HZY-15Z

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HZY-5B	2°C ~ 10°C	5L	285*186*200	2 Kg
HZY-35B	2°C ~ 10°C	35L	550*328*370	9 Kg
HZY-8Z	2°C ~ 10°C	8L	320*265*260	3.5 Kg
HZY-15Z	2°C ~ 10°C	15L	520*300*270	6 Kg

Haier Biomedical Line-Up

WHO Approved

VACCINE REFRIGERATOR/FREEZER

- **Ice-Lined Refrigerator**
- **Vaccine & Icepack Freezer**
- **Solar Direct Drive Vaccine Refrigerator**



HBC-80 HBC-150 HBC-260 HBCD-90



HBD-116 HBD-286



HTC-40 HTC-110

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HBC-80	2~8°C	80L	778*717*872	85 Kg
HBC-150	2~8°C	150L	1128*654*875	105 Kg
HBC-260	2~8°C	260L	1650*654*875	160 Kg
HBCD-90	Freezer ≤-10 Refrigerator: 2~8	Freezer: 32L Refrigerator: 42L	1128*717*872	105 Kg

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HBD-116	-15~-25°C	121L	670*630*915	58 Kg
HBD-286	-15~-25°C	286L	1240*630*915	85 Kg
HTC-40	2~8°C	40L	788*720*875	57 Kg
HTC-110	2~8°C	110L	1128*720*875	75 Kg

PHARMACY REFRIGERATOR

- **Pharmacy Refrigerator 2~8°C**



HYC-68 HYC-68A HYC-118 HYC-118A HYC-290 HYC-390 HYC-390F HYC-610 HYC-940 HYC-940F HYC-1378

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HYC-68	2~8°C	68L	495*580*660	38 Kg
HYC-68A	2~8°C	68L	495*580*660	38 Kg
HYC-118	2~8°C	118L	597*635*810	41 Kg
HYC-118A	2~8°C	118L	597*635*810	46 Kg
HYC-290	2~8°C	290L	665*710*1665	105 Kg
HYC-390	2~8°C	390L	665*710*1965	116 Kg

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HYC-390F	2~8°C	390L	665*710*1965	106 Kg
HYC-610	2~8°C	610L	780*840*1945	204 Kg
HYC-940	2~8°C	890L	1130*755*1980	227 Kg
HYC-940F	2~8°C	890L	1130*755*1980	207 Kg
HYC-1378	2~8°C	1378L	1440*950*1980	310 Kg

BLOOD BANK REFRIGERATOR



HXC-106 **HXC-149** **HXC-358** **HXC-608** **HXC-1308**

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HXC-106	4°C	106L	500*514*1055	49 Kg
HXC-149	4°C	149L	625*820*1150	97 Kg
HXC-358	4°C	358L	720*690*1730	158 Kg

Model	Temp.	Capacity	Ext. Dimension (mm)	Weight
HXC-608	4°C	608L	780*840*1945	204 Kg
HXC-1308	4°C	1308L	1440*925*1980	310 Kg

Haier Biomedical Line-Up

BIOLOGICAL SAFETY CABINET



HR40-IIA2



HR40-IIB2

Model	Airflow Circulation	Main/Exhaust Filter	Ext. Dimension (mm)	Weight
HR40-IIA2	70% Downflow 30% Exhaust	ULPA/HEPA	1360*820*2200	258 Kg
HR40-IIB2	100% Exhaust	ULPA/HEPA	1360*820*2330	252Kg

STANDARD AND CO_2 INCUBATOR



HFP-80 HZP-168 HCP-80 HCP-168 HCP-258

Model	Product Series	Temp Control	Capacity	Ext. Dimension (mm)
HFP-80	Forced Convection	RT+5~105°C	80L	560*662*870
HZP-168	Natural Convection	RT+5~105°C	168L	650*782*1028

Model	Type	Capacity	Ext. Dimension (mm)	Weight
HCP-80	Air Jacket	80L	625*684*735	75 Kg
HCP-168	Air Jacket	170L	714*812*887	95 Kg
HCP-258	Air Jacket	258L	794*867*985	110 Kg

WHO Approved

WALK IN COLD ROOM



Haier walk-in Cold room is designed for storage of vaccines, and the complete unit is designed for installation in a housed area such as a warehouse in order to meet designed temperature standards. Haier's WICs & WIFs have passed WHO/PQS and is long term supplier of UNICEF.

Model	Internal Temperature Range (°C)	Capacity (m^3)
HRZK-20G	2-8°C	20 m^3
HRZK-30G	2-8°C	30 m^3
HRZK-40G	2-8°C	40 m^3
HRZK-40D	-20°C	40 m^3
HRZK-40GD	Cold Room: 2-8°C Freezer Room: -20°C	Cold Room: 25 m^3 Freezer Room: 15 m^3

CENTRIFUGE

- **Mini Centrifuge**
- **Benchtop Centrifuge**
- **Floor-standing**



LX-50T2Z

LX-120T2Z



LX-165T2-J

High-Speed

Refrigerated



LX-165T2R

High-Speed

Refrigerated



LX-185T100R

High-Speed

Refrigerated



LX-60T100-J

Low-Speed

Refrigerated



LX-60T500-J

Low-Speed

Refrigerated



LX-155T500R

High-Speed

Refrigerated



LX-75L2400R

Low-Speed

Refrigerated

Model	Max Speed	Max Capacity (ml)	Ext. Dimension (mm)	Weight
LX-50T2Z	5000 (rpm)	8*1.5/2.0	152*142*122	1.2 Kg
LX-120T2Z	12000 (rpm)	8*1.5/2.0	152*142*122	1.2 Kg
LX-165T2-J	16500 (rpm)	12*5.0	375*270*252	18 Kg
LX-165T2R	16500 (rpm)	12*5.0	340*625*248	34 Kg
LX-185T100R	18500 (r/min)	4*100	420*680*330	57 Kg

Model	Max Speed	Max Capacity (ml)	Ext. Dimension (mm)	Weight
LX-60T100-J	6000 (rpm)	6*100	447*281*340	25 Kg
LX-60T500-J	6000 (rpm)	4*500	624*478*365	60 Kg
LX-155T500R	15500 (r/min)	4*500	658*673*358	112 Kg
LX-75L2400R	7500 (r/min)	6*2400	900*1050*1020	670 Kg

OTHER BIOMEDICAL PRODUCTS



- LN_2 Storage
- Bio-2T Cryovial Transfer Flask
- Controlled Rate Freezer
- Freeze Dryer
- Platelet Incubator with Agitator
- U-Cool Remote Temperature Monitoring Device
- 30-Days Electronic Temperature Logger
- And many more